

Installation Instructions for Fecchetta Pendant

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent lamps may be dimmed with a standard incandescent dimmer.

LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

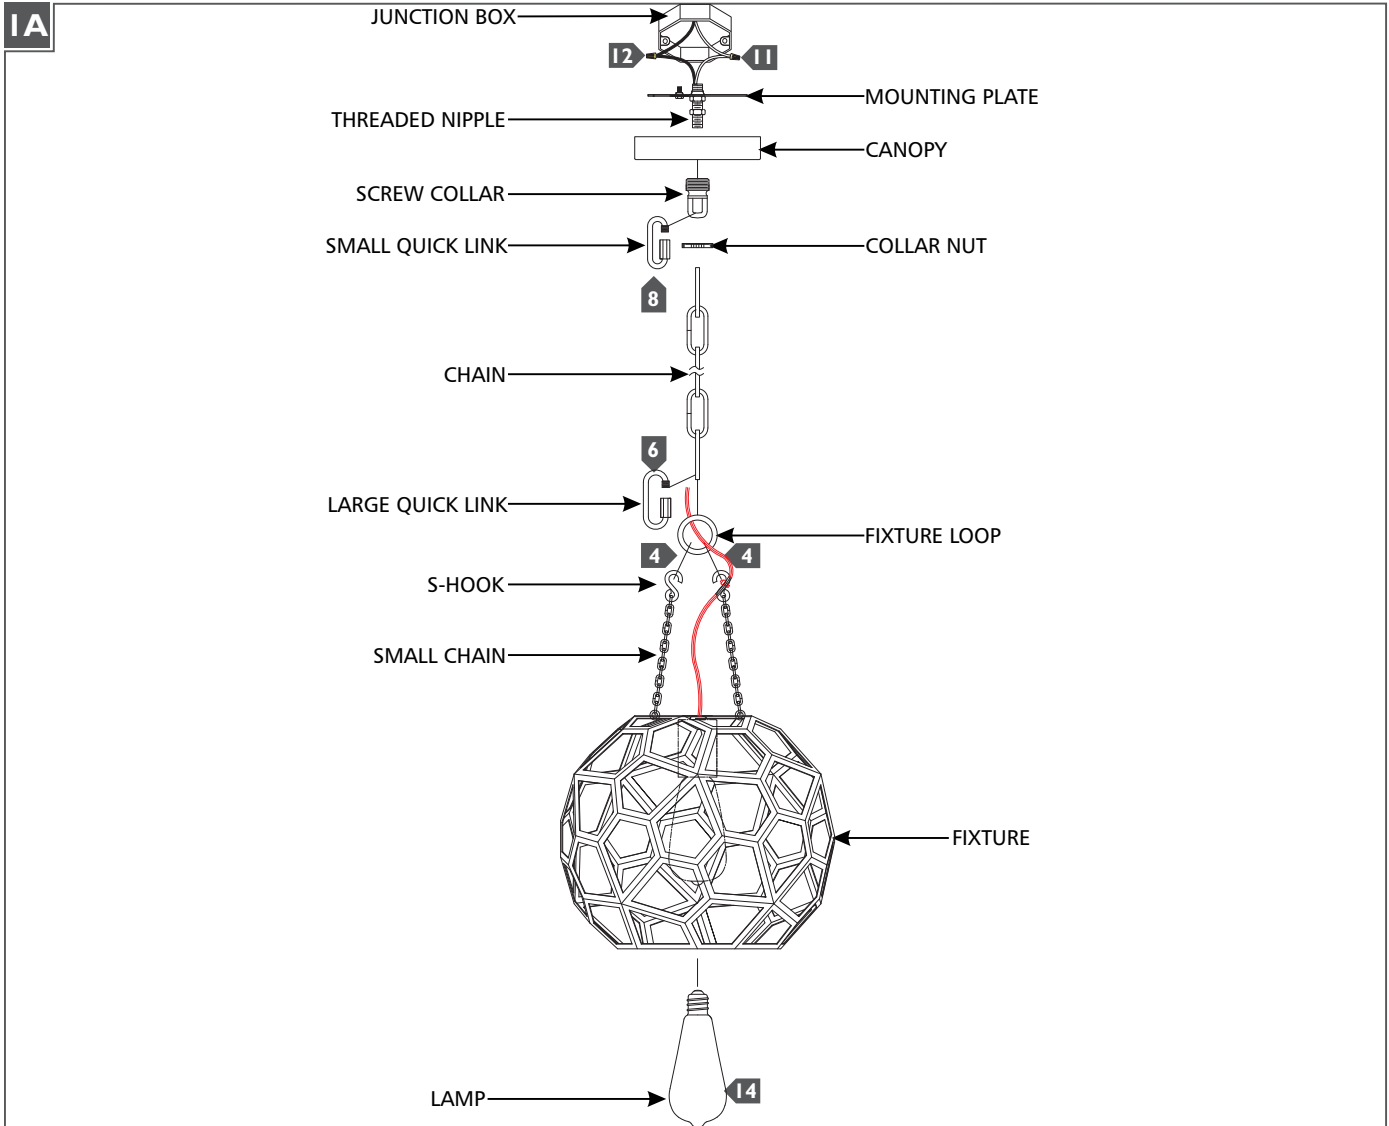

- 1 If necessary, screw the short end of the threaded nipple tightly onto the mounting plate.
- 2 Fasten the screw collar into the bottom end of the threaded nipple and lock into position by tightening the hex nut.
- 3 Secure the mounting plate to the junction box.
- 4 Install the s-hooks from the small chains onto the fixture loop.
- 5 Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 6 Install the large quick link to bottom end of the chain, then secure the quick link onto the fixture loop.
- 7 Unscrew the collar nut from the screw collar, then install the collar nut, and the canopy onto the chain (in that order).
- 8 Install the small quick link onto the remaining end of the chain, then secure the quick link onto the screw collar
- 9 Weave the cord through the fixture loop, chain, collar nut, canopy, screw collar, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 10 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 11 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 12 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 13 Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place by screwing the collar nut onto the screw collar.
- 14 Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.