




AQUITAINE ROUND CHANDELIER 48"
ASSEMBLY & INSTALLATION INSTRUCTIONS
ENGLISH

AQUITAINE ROUND CHANDELIER 48" ENGLISH

AQUITAINE ROUND CHANDELIER 48"

PARTS INCLUDED

- (A) Mounting Plate (1)
- (B) Connection Rods (3)
- (C) Mounting Screws (2)
- (D) Canopy (1)
- (E) Nuts (3)
- (F) Caps (3)
- (G) T-Wrench (1)

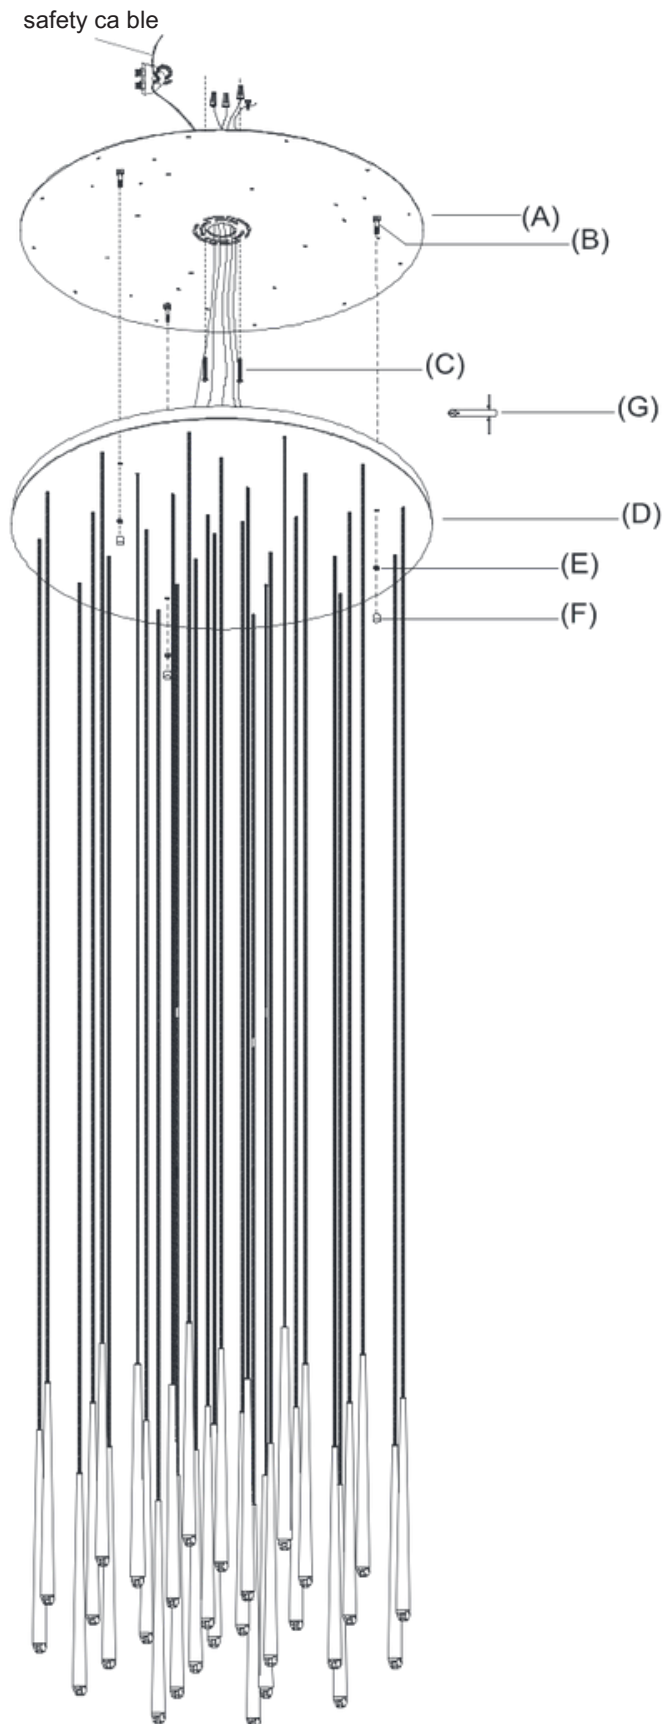

AQUITAINE ROUND CHANDELIER 48" ENGLISH

IMPORTANT: PLEASE READ

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING TO A WOODEN STRUCTURAL BEAM. UNIQUE OR ALTERNATIVE INSTALLATION TYPES MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

IMPORTANT SAFETY FEATURES

This fixture is compatible with an Electric Low Voltage (ELV) Dimmer.

The LED module is replaceable.

VAULTED CEILING COMPATIBILITY

This fixture is not vaulted-ceiling compatible.

DIMMER SWITCH COMPATIBILITY

This fixture is dimmer-switch compatible and may only be used with a forward-phase dimmer switch.

CEILING REINFORCEMENT

Fixtures weighing 50 lbs or more will require additional reinforcement above the ceiling where they are to be installed.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulbs. Do not touch or look directly at the bulbs when fixture is illuminated. Keep flammable materials away from lit bulbs.

 **WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

CAUTION:

The light source contained in this fixture should only be replaced by the manufacturer, their service agent, or a similarly qualified person.

If the external flexible cable or cord of this fixture is damaged, it should be exclusively replaced by the manufacturer, their service agent, or a similarly qualified professional.

WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds.


Keep out of reach of children under 3 years of age.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

SAFETY CABLE INSTALLATION

1. Run safety cable through junction box and around structural member of building.

2. Wrap the safety cable around the Saddle (a) and secure with U-Bolt (b) and Hex Nuts (c).

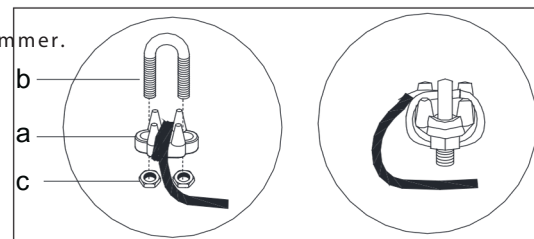

AQUITAINE ROUND CHANDELIER 48" ENGLISH

ASSEMBLY AND INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Remove Mounting Plate (A) from Canopy (D) by removing Caps (F) and Nuts (E).
3. Affix Mounting Plate (A) to the ceiling and secure with Mounting Screws (C) and other proper fasteners from your local hardware store.
4. Connect the safety steel wire from the fixture to the safety cable from the ceiling. (Refer to the illustration on the previous page).
5. Attach the fixture ground wire (green or green/yellow) to the ground wire from the outlet box (usually green insulation or bare) with a plastic wire connector and wrap the connection with electrical tape. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
6. Connect the neutral wire from the ballast (white wire) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
7. Connect the hot wire (black wire) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
8. Attach Canopy (D) to the fixture body and affixed Mounting Plate (A). Let Connection Rods (B) pass through the holes on Canopy (D) and secure with Nuts (E) and Caps (F).
9. Restore power to outlet box and check operation of fixture.
10. Assembly is complete.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.

AQUITAINE ROUND CHANDELIER 48" ENGLISH

HANG HEIGHT ADJUSTMENT INSTRUCTIONS



CAUTION: Any rewiring should be done based on the circuit diagram shown at the bottom to avoid LED electrical appliances

burning. Tighten the set screws on top of the cord clips using an Allen Wrench.

2. Determine the hanging length for each of the drops. Pull the hanging cords out through the cord clips and extend to the desired ceiling height (refer to illustrations on the right).
3. Replace the screws and tighten to lock hanging cords in place using an Allen Wrench.
4. Cut off the excess wiring with a wire cutter. Remove the wire connectors using pliers.
5. Take apart the connection cord and set aside.
6. Use a pair of wire strippers to remove about 1/2" (13mm) of insulation from each wire.

ATTENTION: ADJUSTING THE HANG HEIGHT

Any adjustments or alterations to the fixture, cord, or overall hang height that differ from those detailed on RH.com will void the Laboratory Listing and Approvals (UL, ETL, CSA, etc.). If the listing is voided, this means the product may no longer be safe for use as modified. RH does not recommend modifying the product.

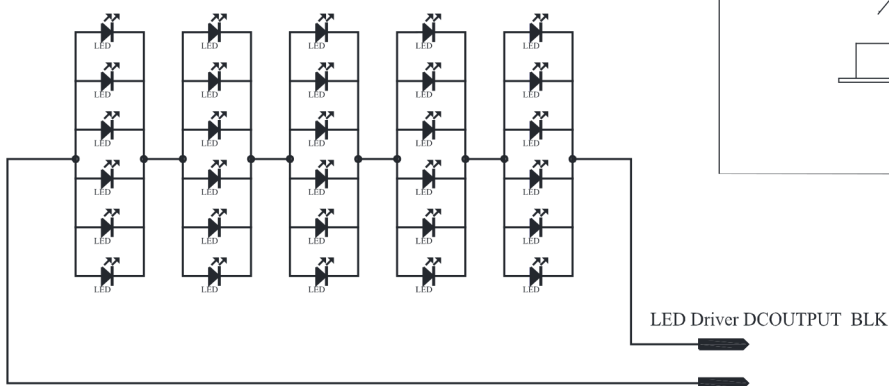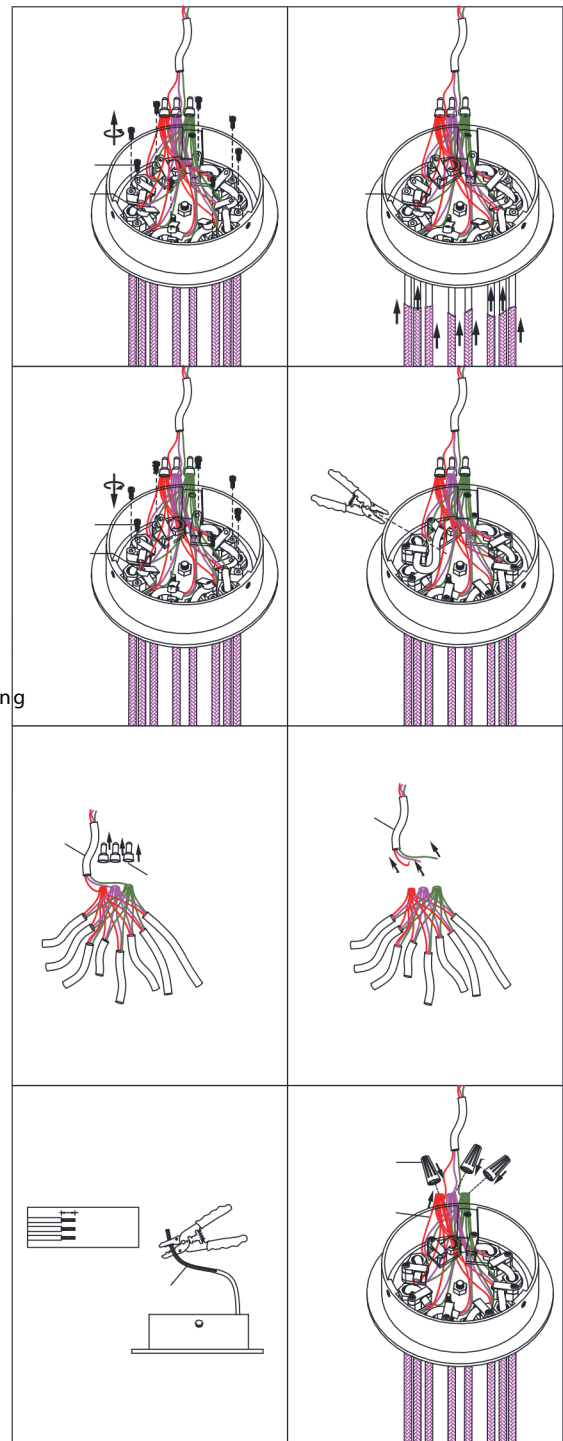


Driver model:LD048H-CU13336-M48E

AQUITAINE ROUND CHANDELIER 48" ENGLISH

LED MODULE REPLACEMENT INSTRUCTIONS








1. Remove the set screw using a small flathead screwdriver. Set aside and do not discard this screw, as it will be reinstalled at a later step. (See diagram 1.)
2. Grasp the faceted crystal piece at the end of the tapered rod and turn counterclockwise to loosen. (See diagram 2.)
3. Gently pull the crystal module out of the tapered rod, allowing the black cloth cord to pass through the other end of the rod. (See diagram 3.)
4. Clip the small zip tie that is holding the wires in a bundle. DO NOT CUT ANY OF THE WIRES! (See diagram 4.)
5. Separate the first wire crimp that is connecting the red wire from the LED module and the black wire from the main power cord. Notice that the crimp has a metal band in the center that has been squeezed into an oval shape. (See diagram 5.)
6. Using a pair of pliers, place the crimp into the jaws of the pliers so that the oval-shaped metal band is situated as shown in the image. Apply gentle pressure so that the metal band in the crimp becomes round instead of oval. Repeat this step for the other crimp that is connecting the black wire from the LED module to the white wire from the main power cord. (See diagram 6.)
7. Identify the Phillips ground screw that is connecting the green ground wire to the LED module. (See diagram 7.)
8. Remove the ground screw using a Phillips screwdriver. Set this screw aside, but do not discard. (See diagram 8.)

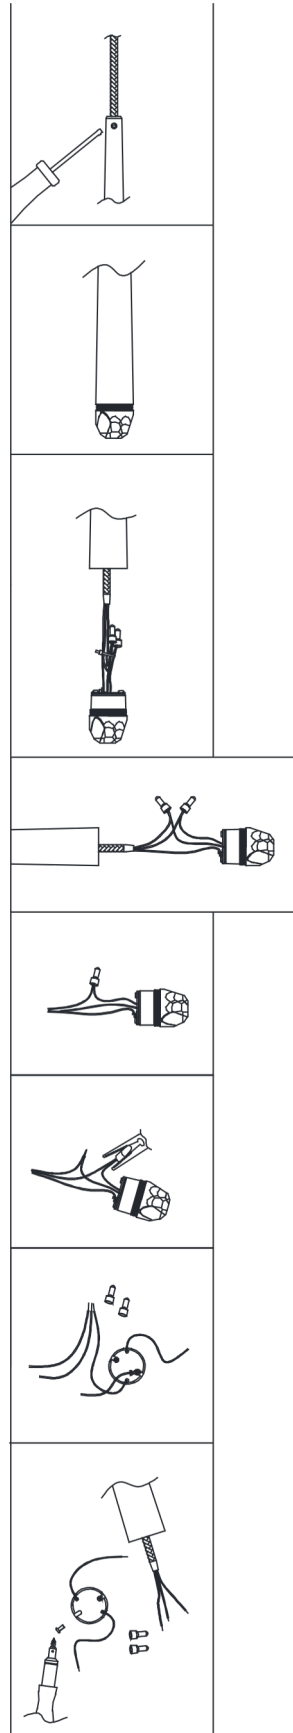

AQUITAINE ROUND CHANDELIER 48" ENGLISH

LED MODULE REPLACEMENT INSTRUCTIONS

9. Attach the ground wire to the replacement LED module using the Phillips ground screw from Step 8. (See diagram 9.)
10. Twist the white wire from the power cord and the black wire from the replacement LED module. (See diagram 10.)
11. Place a crimp connector over the twisted wires, and firmly squeeze the crimp connector using pliers. Gently pull on the crimp connector to make sure it is securely connected to the wires inside. Repeat this step to connect the red wire from the LED module to the black wire from the main power cord. (See diagram 11.)
12. Bundle the wires. (See diagram 12.)
13. Secure the bundled wires using a small zip tie. Pull the zip tie until firm, but do not overtighten. Push the wires back into tapered rod while allowing the main power cord to slide out of the other end of the tapered rod. (See diagram 13.)
14. Grasp the faceted crystal piece and turn clockwise to thread the LED module back into the tapered rod. Twist until tight, but do not overtighten. (See diagram 14.)
15. Using a small flathead screwdriver, reinsert the set screw that was removed in Step 1. Twist until tight, but do not overtighten. (See diagram 15.)

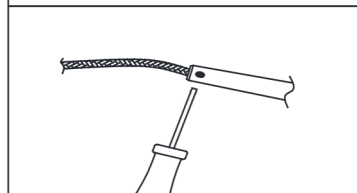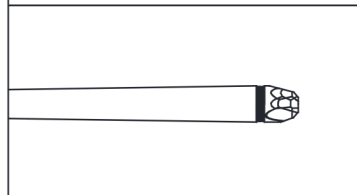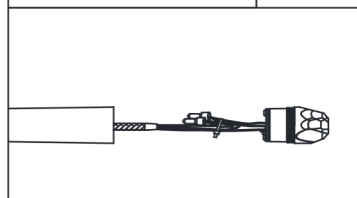

AQUITAINE ROUND CHANDELIER 48" ENGLISH

FCC COMPLIANCE:

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IC COMPLIANCE:

This Class B digital apparatus complies with CAN ICES-005 (B) /NMB-005(B).

RESTORATION HARDWARE

15 KOCH ROAD
CORTE MADERA, CA 94925
1-800-762-1005