

# MODERN RAIL PENDANT


ASSEMBLY AND INSTALLATION INSTRUCTIONS

**ENGLISH**

**MODERN RAIL PENDANT**

**PARTS INCLUDED**

- (A) Canopy (1)
- (B) Mounting Plate (1)
- (C) Canopy Screws (2)
- (D) Allen Wrench (1)
- (E) Driver (1)
- (F) Mounting Screws (2)
- (G) Pivot (1)
- (H) Hub (1)
- (I) Stems (6)
- (J) Wire Nuts (5)
- (K) Modules (8)
- (L) Shades (8)
- (M) Rail (1)

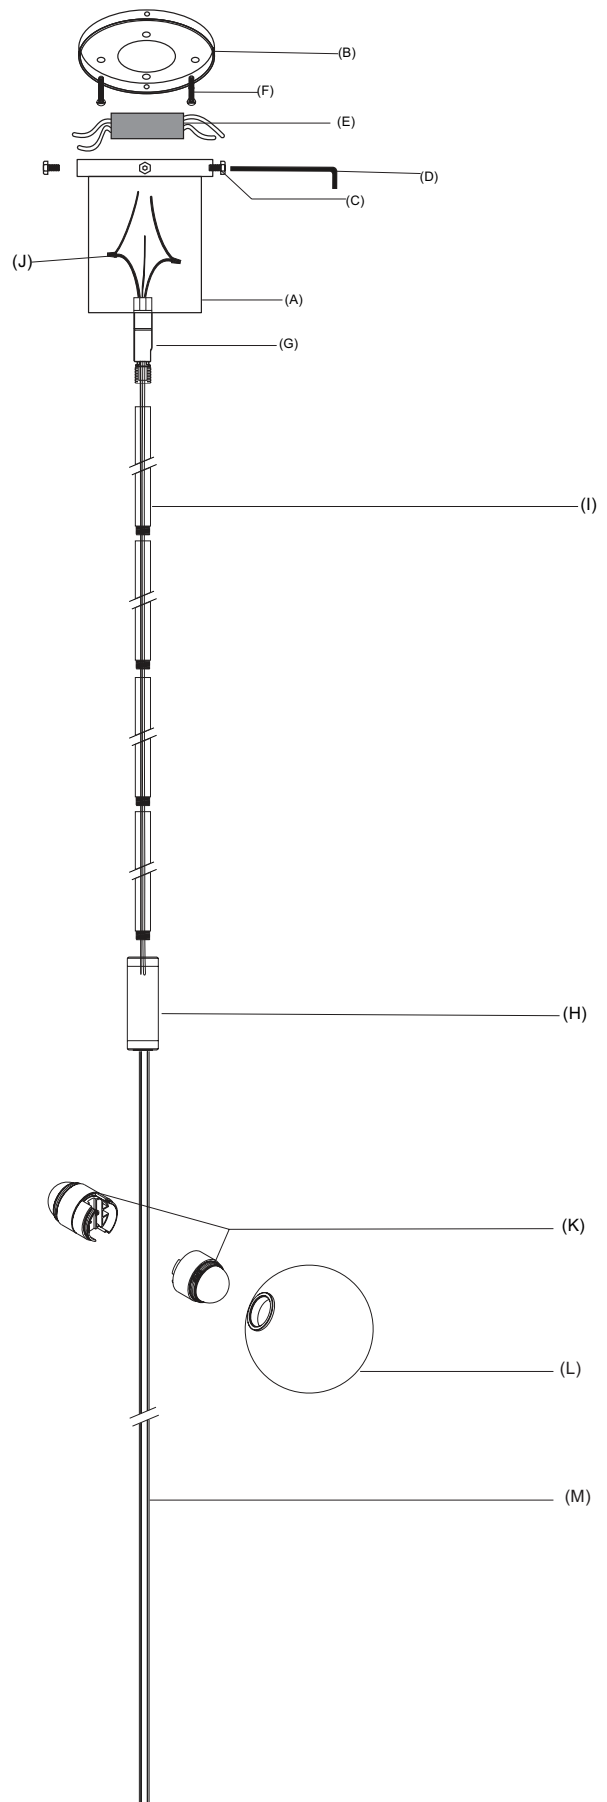

### IMPORTANT: PLEASE READ

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING DIRECTLY TO A JUNCTION BOX. UNIQUE OR ALTERNATIVE INSTALLATION TYPES MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

### IMPORTANT SAFETY FEATURES

#### BULBS

This fixture has been rated for up to 4 LED modules with 42-watt maximum.

To avoid the risk of fire, do not exceed the recommended wattage.

#### DIMMER SWITCH COMPATIBILITY

This fixture is dimmer-switch compatible, and may only be used with a low-voltage electronic dimmer switch.

### WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.

### WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

**THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.**



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.

### ASSEMBLY AND INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

#### Install the Fixture

1. Carefully remove all parts from the box and remove all plastic packaging.
2. Remove mounting plate (B) from canopy (A) by unscrew canopy screws (C) using Allen Wrench (D).
3. Connect driver (E) to the fixture house wires.
4. Secure mounting plate (B) to the ceiling junction box with the mounting screws (F).
5. This fixture ships with stems (I). If necessary, stems (I) may be unscrewed from the hub and/or pivot (G), then replaced with another stem length to accommodate the desired height or appearance.
6. Plan accordingly and determine the desired height of the fixture using stems (I). Once the desired height of the fixture has been determined, assemble the stems (I) by screwing them together.
7. Feed the fixture wires through stem (I) assembly, then screw the stem assembly to hub (H).
8. Feed the fixture wires through canopy (A), then screw the stem assembly to pivot (G).
9. Leave 6" of the cord behind the canopy for power connections. Cut the excess cord.
10. From the end of the cord, strip the insulation 4". Make sure not to nick the inner wires.
11. Connect the fixture ground wire to a suitable ground in accordance with local electrical codes using a wire nut (J).
12. Connect the black fixture wire to the black (-) driver wire with a wire nut (J).
13. Connect the red fixture wire to the red (+) driver wire with a wire nut (J).
14. Connect the driver neutral wire (black) with the neutral wire from the junction box using a wire nut (J).
15. Connect the driver hot wire (red) with the hot wire from the junction box using a wire Nut (J). DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
16. Neatly place all wire connections inside the canopy (A).
17. Align the canopy holes with the mounting plate holes. Secure canopy (A) in place by tightening canopy screws (C) using the provided Allen wrench (D).
18. Adjust pivot (G) as necessary. Note: pivot accommodates up to a 45-degree ceiling.

#### Install the Module and Shade

19. Separate the two halves of module (K) by unscrewing them from one another.
20. Install the two module halves onto rail (M) and secure in place

by screwing them together. Make sure to match the polarity markings positive (+) and negative (-) on rail (M).

21. Install shade (L) by screwing it into the base. Do not over-tighten.
22. Repeat steps 19-21 for remaining modules.
23. Assembly is completed.

**FCC COMPLIANCE:**

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**IC COMPLIANCE:**

This Class B digital apparatus complies with CAN ICES-005 (B) / NMB-005(B).

RESTORATION HARDWARE  
15 KOCH ROAD  
CORTE MADERA, CA 94925  
1-800-762-1005