

Forge Pendants

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Dimmable with most LED compatible ELV, TRIAC and 0-10V dimmers

This instruction shows a typical installation.




CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

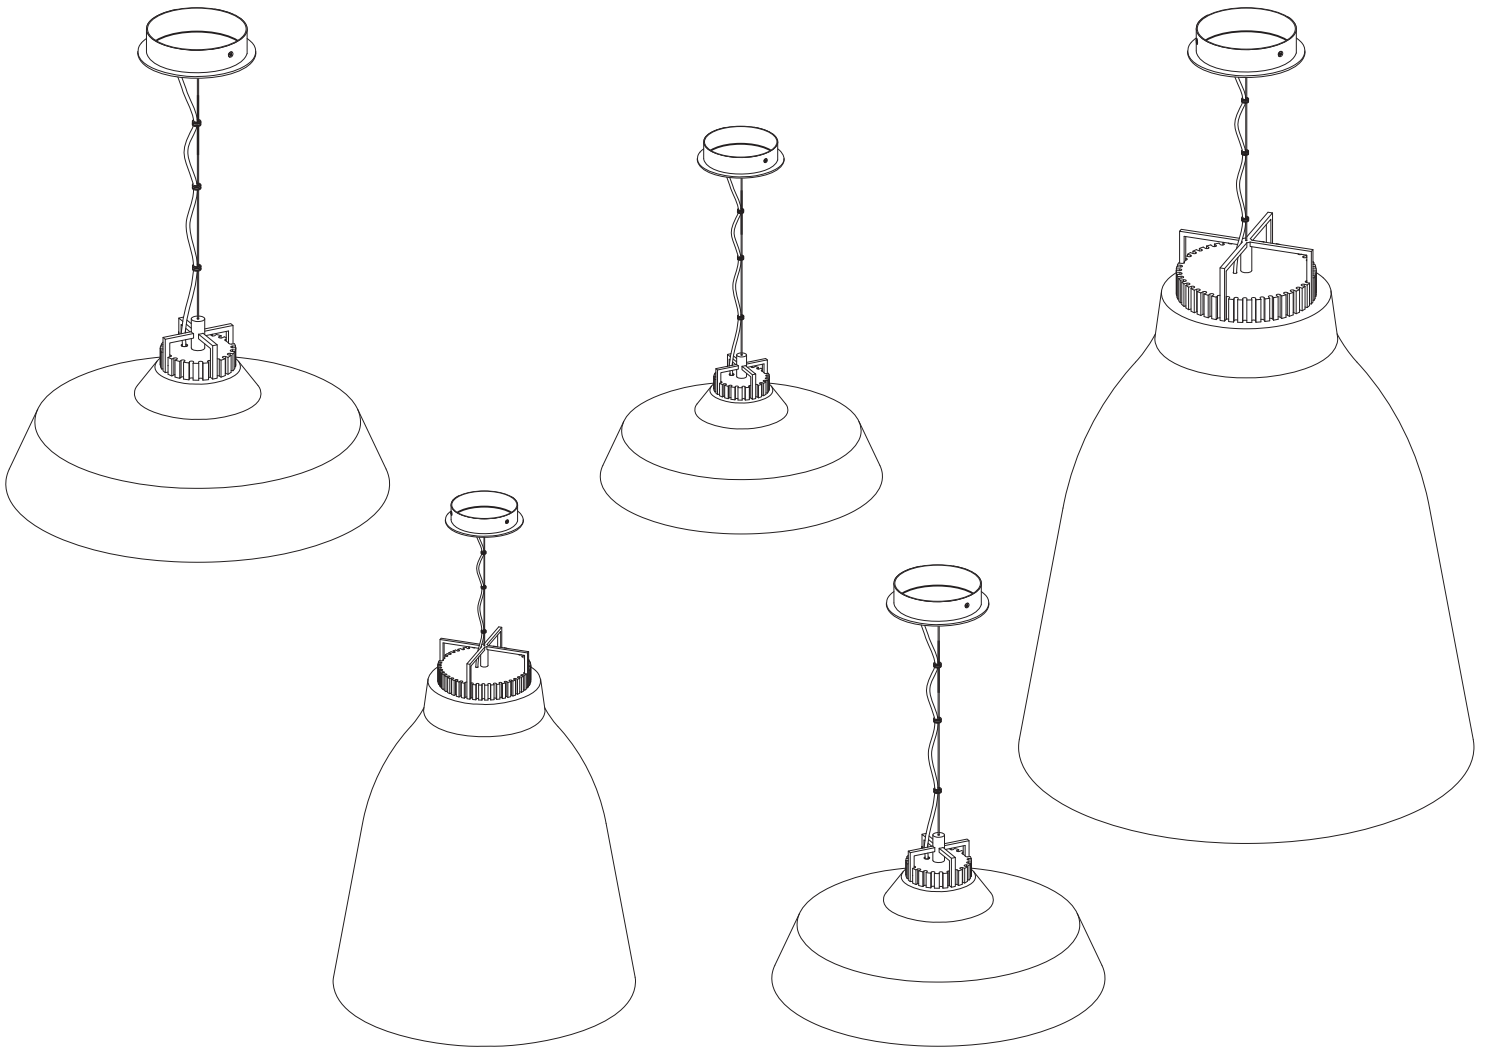

Install the Fixture

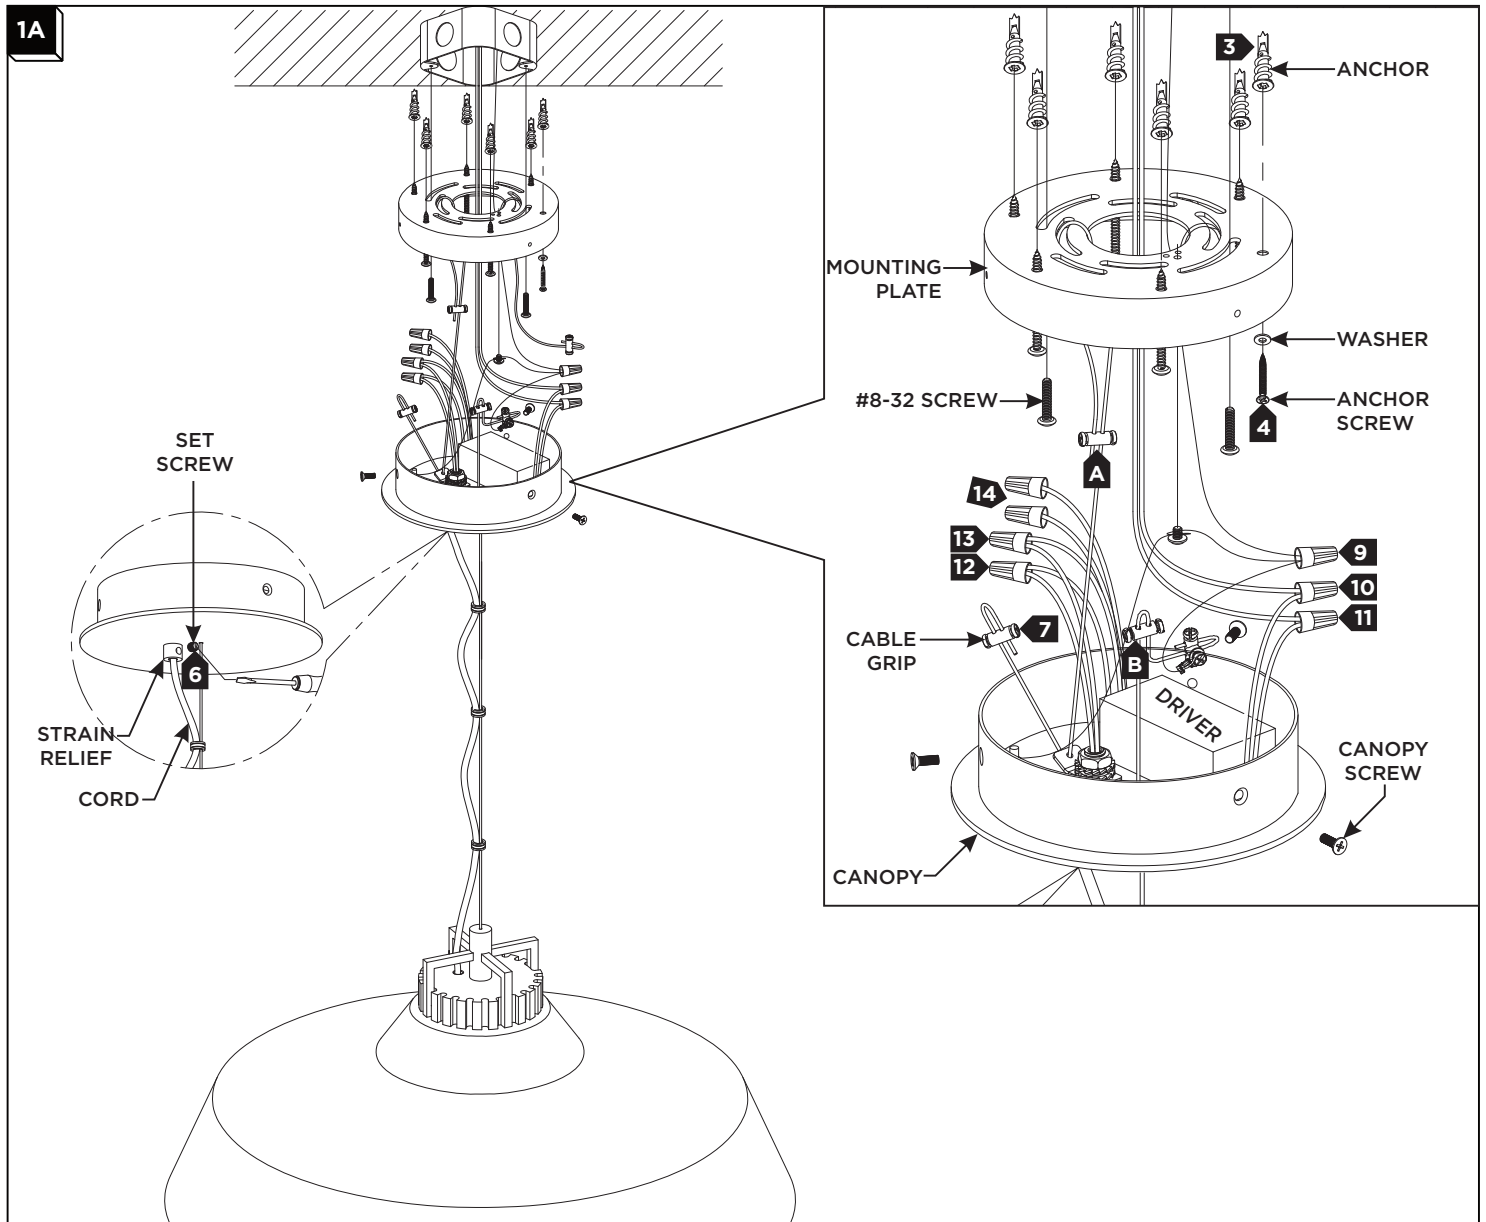

- 1** Remove the canopy screws on the sides of the canopy, then remove the mounting plate from the canopy.
- 2** Temporarily install the mounting plate to the junction box with the two #8-32 screws provided. Mark the location of the anchors and remove the mounting plate.
- 3** Line up an anchor tip with the center of an anchor hole in the marked position, and push the anchor into the ceiling up to the threads. Screw the anchor in the rest of the way with a Phillips-head screwdriver. Repeat this step for the remaining anchor.
- 4** Reinstall the mounting plate to the junction box. Then slide an anchor screw through a washer and screw it into an anchor to secure the mounting plate to the ceiling. Repeat this step for the remaining anchor screw.
- 5 Adjust the Fixture Height:** Place the fixture on a level surface. Loosen (do not remove) the screws on the cable grip at B and pull the cables through the canopy to raise the fixture to the desired height, slide the cable grip accordingly.
- 6** With a flathead screwdriver, loosen (do not remove) the set screw on the strain relief. Pull the cord up through the strain relief to the desired length (but be sure the cord is longer than the cable) and re-tighten the screws on the cable grip and the set-screw on the strain relief.
- 7** Remove the cable grip A, pull the cable up and down through the mounting plate as shown, feed the cables through the cable grips, and secure them to the mounting plate as shown. Tighten the screws to secure the cables.
- 8** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 9** Connect the white input driver wire to the neutral power line wire with a wire nut.
- 10** Connect the black input driver wire to the hot power line wire with a wire nut.
- 11** Connect the negative (-) fixture wire to the negative (-) output driver wire with a wire nut.
- 12** Connect the positive (+) fixture wire to the positive (+) output driver wire with a wire nut.
- 13** If using 0-10V dimming, connect the purple and gray/pink wires to a compatible dimmer. If not using 0-10V dimming, make sure to cap off these wires.
- 14** Neatly place the driver, wires, and wire nut connections inside the canopy reinstall canopy to the mounting plate, and secure it in place with the canopy screws.