



BECKMAN ROUNDCHANDELIER 44"


ASSEMBLY AND INSTALLATION INSTRUCTIONS
ENGLISH

BECKMAN ROUND CHANDELIER 44" ENGLISH

BECKMAN ROUND CHANDELIER 44"

PARTS INCLUDED

- (A) Mounting Strap (1)
- (B) Threaded Nipple (1)
- (C) Mounting Loop (1)
- (D) Canopy (1)
- (E) Canopy Ring (1)
- (F) Quick Link (1)
- (G) Hanging Loop (1)
- (H) 18" Connection Rods (2)
- (I) Connective Tubes (5)
- (J) 12" Connection Rods (2)
- (K) 6" Connection Rods (2)
- (L) Loop (1)
- (M) Top Hook (1)
- (N) Screws (2)
- (O) Lantern Box (1)
- (P) Glass Panels (4)
- (Q) Set Screws (8)
- (R) Metal Tabs (4)
- (S) Wrench (1)
- (T) Bulbs (8)
- (U) Wire Nuts (3)

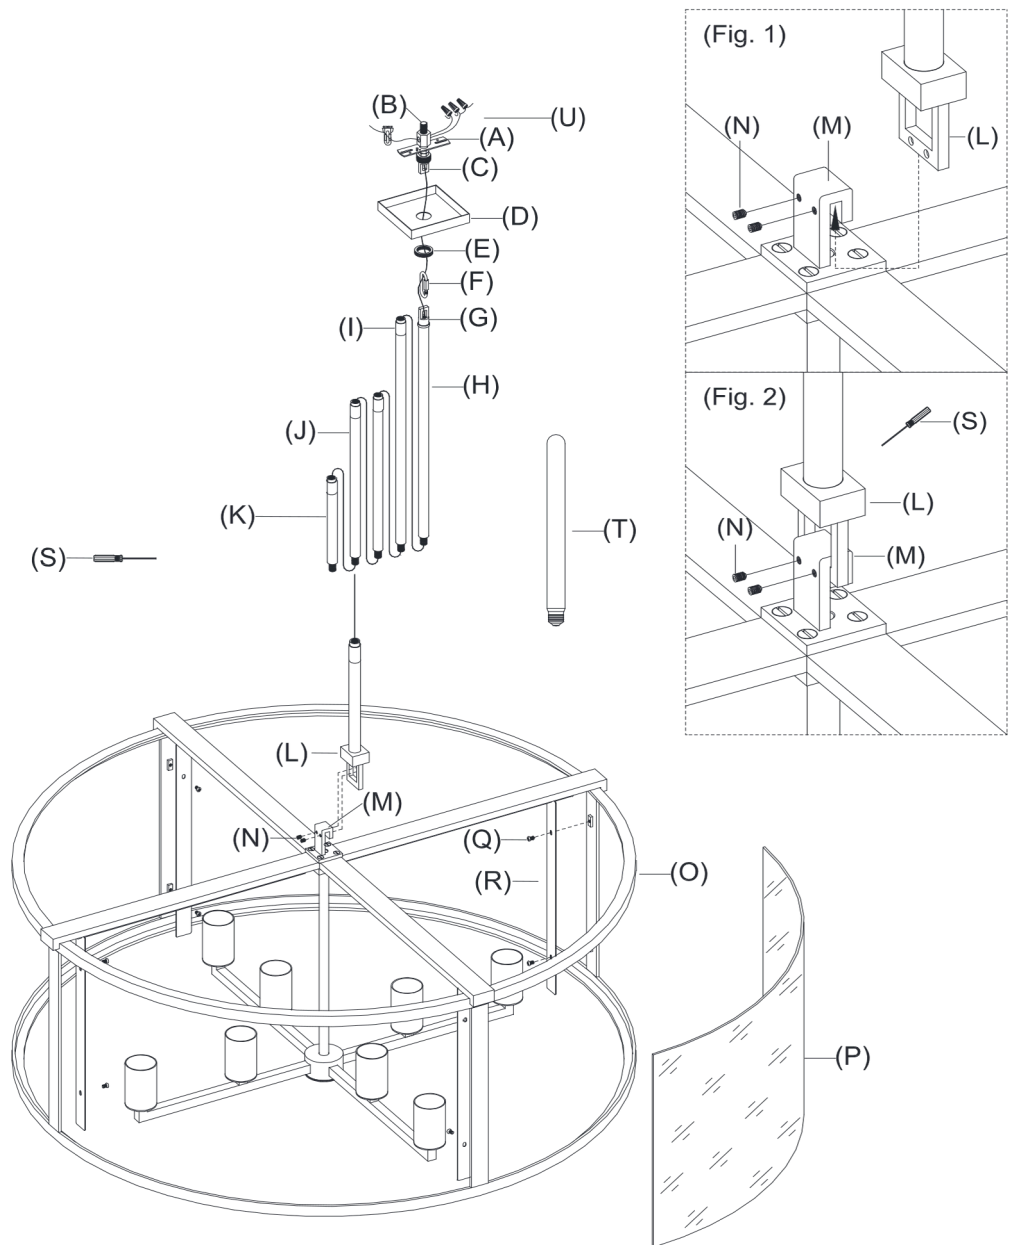

IMPORTANT: PLEASE READ

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING DIRECTLY TO A JUNCTION BOX. UNIQUE OR ALTERNATIVE INSTALLATION METHODS MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

IMPORTANT SAFETY FEATURES

BULBS

This fixture has been rated for eight (8) 40-watt maximum Type T incandescent lightbulbs or eight (8) 6.5-watt maximum SBLED lightbulbs. To avoid the risk of fire, do not exceed the recommended wattage.

VAULTED CEILING COMPATIBILITY

This fixture is vaulted-ceiling compatible, up to a maximum ceiling slope of 20 degrees.

DIMMER SWITCH COMPATIBILITY

This fixture is dimmer-switch compatible and may be used with either a forward-phase or reverse-phase dimmer switch.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm.

For more information, go to www.P65Warnings.ca.gov.


WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

INSTALL SAFETY CABLE:

1. Run safety cable through junction box and around structural member of building.
2. Wrap the safety cable around the saddle (a), and secure with u-bolt (b) and hex nuts (c).

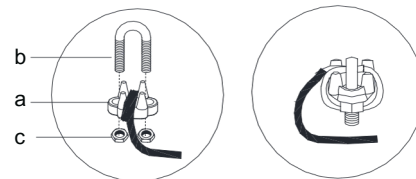

BECKMAN ROUND CHANDELIER 44" ENGLISH

ASSEMBLY AND INSTALLATION

**SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM
THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Carefully remove all parts from the box and remove plastic coverings. Place on a clean, soft surface.
2. Remove Metal Tabs (R) by first removing Set Screws (Q). Install Glass Panels (P) to each frame on the side of Lantern Box (O), then secure with Metal Tabs (R) and Set Screws (Q).
3. Remove Screws (N) from Top Hook (M), then attach Loop (L) to Top Hook (M) by aligning holes and secure with Screws (N). Tighten using Wrench (S). (Refer to the illustration Figure 1 and Figure 2 on Page 2)
4. Determine the hanging length of chandelier. Connect Lantern Box (O) to some or all Connection Rods (H) (J) (K) and Connective Tubes (I) according to the height needed. Note: Pre-wire the connection rods before putting them together.
5. Feed wires through Connection Rods (H) (J) (K), Hanging Loop (G), Canopy Ring (E), Canopy (D) and Mounting Loop (C). Screw Quick Link (F) onto Hanging Loop (G).
6. Unscrew Canopy Ring (E). Slide Canopy Ring (E) and Canopy (D) onto Connection Rods (H) (J) (K).
7. A 1/4" IPS PIPE must be installed to your ceiling, then install Threaded Nipple (B) into the 1/4" IPS PIPE.
8. Affix Mounting Strap (A) to the ceiling and secure with mounting screws (not included). Proper fasteners can be found from your local hardware store.
9. Connect the safety cable as shown in the diagram on the previous page.
10. Gently pull the wire from the ceiling junction box and allow the wire to hang. Thread the wire through the center hole in Mounting Strap (A).
11. Wrap fixture ground wire (bare copper) around the green grounding screw and tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using a Wire Nut (U). NOTE: It is imperative that the fixture is grounded.
12. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using a Wire Nut (U).

13. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using a Wire Nut (U).
14. Tuck the wire connection neatly into the ceiling outlet box.
15. Connect Hanging Loop (G) to Mounting Loop (C) by opening and closing Quick Link (F).
16. Install Canopy (D) to Mounting Strap (A) and secure with Canopy Ring (E).
17. Insert Bulbs (T) into each of the sockets.
18. Assembly is complete. Restore power to junction box and check operation of fixture.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with dry cloth.