


HEMISPHERE LINEAR CHANDELIER 54"
ASSEMBLY & INSTALLATION INSTRUCTIONS
ENGLISH

HEMISPHERE LINEAR CHANDELIER 54"

PARTS INCLUDED

- (A) Wire Nuts (3)
- (B) Safety Cables (2)
- (C) Mounting Plate (1)
- (D) Mounting Screws (2)
- (E) Nuts (6)
- (F) Washers (6)
- (G) Metal Plate (1)
- (H) Canopy (1)
- (I) Canopy Screws (6)
- (J) Hanging Rods (6)
- (K) T-Wrench (1)
- (L) Screwdriver (1)
- (M) Fixture Body (1)
- (N) Sockets (9)
- (O) Shades (9)
- (P) Bulbs (9)

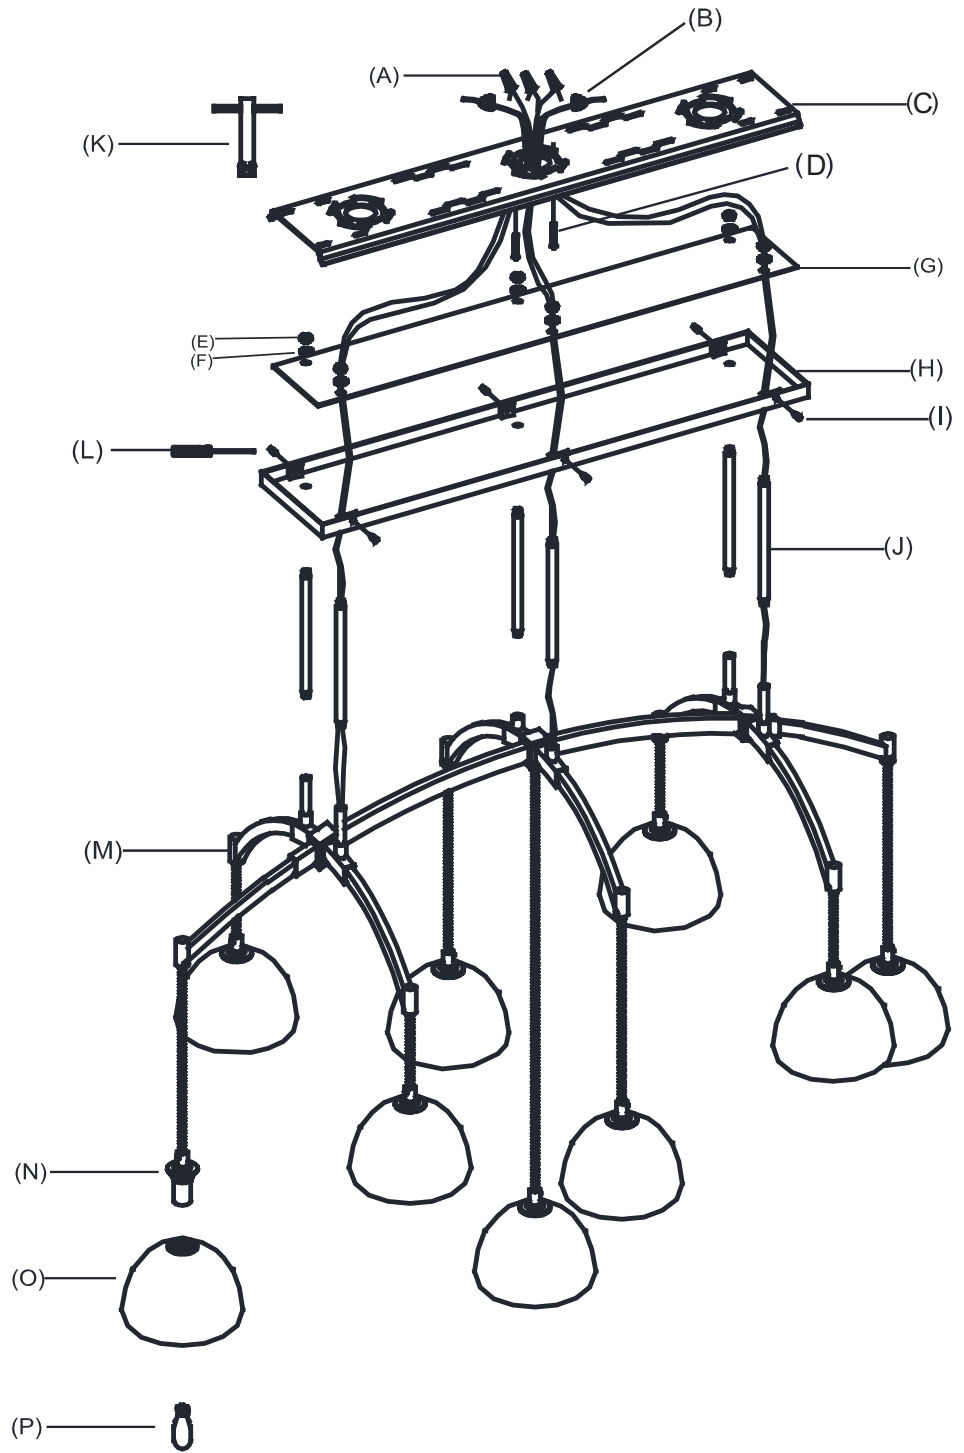

IMPORTANT: PLEASE READ

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING DIRECTLY TO A JUNCTION BOX. UNIQUE, OR ALTERNATIVE, INSTALLATION TYPES MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

IMPORTANT SAFETY FEATURES

BULBS

This fixture has been rated for nine (9) 40-watt maximum Type T incandescent lightbulbs, or nine (9) 5.5-watt maximum SBLED lightbulbs. To avoid the risk of fire, do not exceed the recommended wattage.

VAULTED CEILING COMPATIBILITY

This fixture is vaulted-ceiling compatible up to a maximum ceiling slope of 20 degrees.

DIMMER SWITCH COMPATIBILITY

This fixture is dimmer-switch compatible and may only be used with a forward-phase dimmer switch.

CEILING REINFORCEMENT

Fixtures weighing 50 lbs or more will require additional reinforcement above the ceiling where they are to be installed.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulbs. Do not touch or look directly at the bulbs when fixture is illuminated. Keep flammable materials away from lit bulbs.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.


WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

SAFETY CABLE INSTALLATION

1. Run safety cable through junction box and around structural member of building.
2. Wrap the safety cable around the saddle (a) and secure with u-bolt (b) and hex nuts (c).

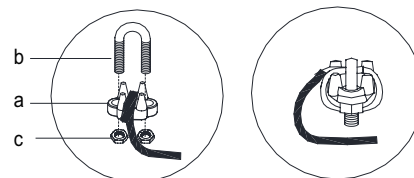

ASSEMBLY AND INSTALLATION

**SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM
THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Remove Mounting Plate (C) from Canopy (H) by loosening Canopy Screws (I) using Screwdriver (L).
3. Attach Mounting Plate (C) to the ceiling junction box and secure with Mounting Screws (D) or other, proper fasteners from your local hardware store.
4. Feed fixture wires through Hanging Rods (J), then connect Hanging Rods (J) to Fixture Body (M). Note: Hanging Rods (J) can be removed for a shorter hang height.
5. Continue feeding the wires through Canopy (H), Metal Plate (G), Washers (F), and Nuts (E).
6. Affix Canopy (H) and Metal Plate (G) to the inner threaded rods of Hanging Rods (J). Secure with Washers (F) and Nuts (E) using T-Wrench (K). Note: If Hanging Rods (J) were removed, then affix Canopy (H) and Metal Plate (G) to Fixture Body (M) directly.
7. Cut any excess wire length. Be sure to have enough wire left to reach the junction box.
8. Wrap fixture ground wire (bare copper or green) around the green grounding screw and tighten. Continue feeding fixture ground wire and connect to supply ground wire (usually green or bare copper) using a Wire Nut (A). NOTE: It is imperative that the fixture is properly grounded.
9. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using a Wire Nut (A).
10. Connect fixture hot wire (black) to the supply hot wire (usually black) using a Wire Nut (A). CAUTION: Do not reverse the hot and neutral connections or safety will be compromised.
11. Make sure all wire connections are tight, then carefully tuck them into the junction box.
12. Attach Canopy (H) to Mounting Plate (C) and secure with Canopy Screws (I) using Screwdriver (L).
13. Place Shades (O) onto each Socket (N).
14. Screw Bulbs (P) into each Socket (N).
15. Restore power to outlet box and check operation of fixture.
16. Assembly is complete.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture.

Wipe clean with a soft, dry cloth.