


**HEMISPHERE LINEAR CHANDELIER 72"**  
ASSEMBLY & INSTALLATION INSTRUCTIONS  
**ENGLISH**

HEMISPHERE LINEAR CHANDELIER 72"

PARTS INCLUDED

- (A) Wire Nuts (3)
- (B) Safety Cables (2)
- (C) Mounting Plate (1)
- (D) Mounting Screws (2)
- (E) Nuts (6)
- (F) Washers (6)
- (G) Metal Plate (1)
- (H) Canopy (1)
- (I) Canopy Screws (6)
- (J) Hanging Rods (6)
- (K) T-Wrench (1)
- (L) Screwdriver (1)
- (M) Fixture Body (1)
- (N) Sockets (11)
- (O) Shades (11)
- (P) Bulbs (11)

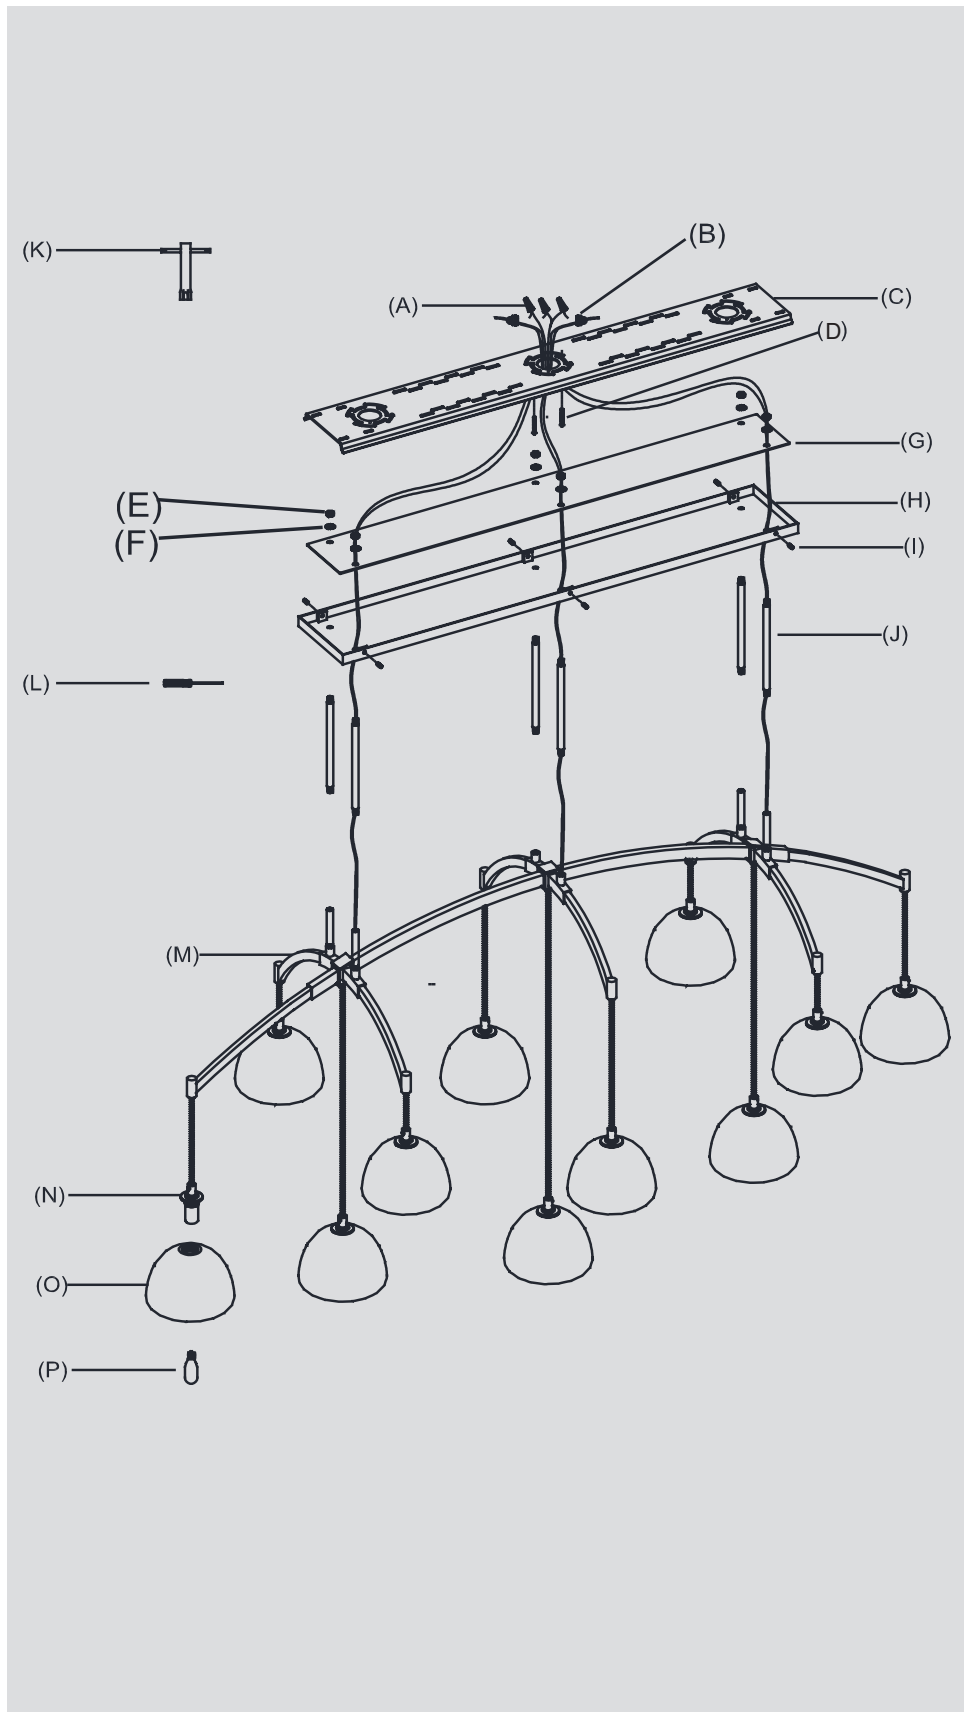

**IMPORTANT: PLEASE READ**

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING DIRECTLY TO A JUNCTION BOX. UNIQUE OR ALTERNATIVE INSTALLATION METHODS MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

**IMPORTANT SAFETY FEATURES**

**BULBS**

This fixture has been rated for up to eleven (11) 40-watt maximum Type T incandescent lightbulbs or eleven (11) 5.5-watt maximum SBLED lightbulbs. To avoid the risk of fire, do not exceed the recommended wattage.

**VAULTED-CEILING COMPATIBILITY**

This fixture is vaulted-ceiling compatible, up to a maximum ceiling slope of 20 degrees.

**DIMMER-SWITCH COMPATIBILITY**

This fixture is dimmer-switch compatible, and may only be used with a forward-phase dimmer switch.

**WARNINGS**

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulbs. Do not touch or look directly at the bulbs when fixture is illuminated. Keep flammable materials away from lit bulbs.



**WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.


**THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.**

**CEILING REINFORCEMENT**

Fixtures weighing 50 lbs. or more will require additional reinforcement above the ceiling where they are to be installed.

**INSTALL SAFETY CABLE:**

1. Run safety cable through junction box and around structural member of building.
2. Wrap the safety cable around the saddle (a), and secure with u-bolt (b) and hex nuts (c).

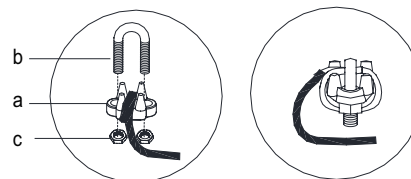

## ASSEMBLY AND INSTALLATION

**SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Carefully remove all parts from box and remove all plastic coverings.
2. Remove Mounting Plate (C) from Canopy (H) by loosening Canopy Screws (I) using Screwdriver (L).
3. Install Mounting Plate (C) to the ceiling outlet box and secure with Mounting Screws (D) and other proper fasteners from your local hardware store.
4. Feed the fixture wires through Hanging Rods (J), then connect each of Hanging Rods (J) to Fixture Body (M).  
Note: If a short fixture height is desired, Hanging Rods (J) can be removed.
5. Continue feeding the wires through Canopy (H), Metal Plate (G), Washers (F), and Nuts (E).
6. Install Canopy (H) and Metal Plate (G) to the inner threading rods of Hanging Rods (J). Secure with Washer (F) and Nut (E) using T-Wrench (K). Note: If Hanging Rods (J) were removed, then install Canopy (H) and Metal Plate (G) to Fixture Body (M) directly.
7. Cut the extra wires. Be sure to have enough wire left to reach the junction box.
8. Wrap fixture ground wire (bare copper or green) around the green grounding screw and tighten. Continue feeding fixture ground wire and connect to supply ground wire (usually green or bare copper) using a Wire Nut (A). NOTE: It is imperative that the fixture is grounded.
9. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using a Wire Nut (A).
10. Connect fixture hot wire (black) to the supply hot wire (usually black) using a Wire Nut (A). CAUTION: Do not reverse the hot and neutral connections.
11. Make sure all wire connections are tight, then carefully tuck into the junction box.
12. Install Canopy (H) to Mounting Plate (C) and secure with Canopy Screws (I) using Screwdriver (L).
13. Install Shades (O) to each of Sockets (N).
14. Install Bulbs (P) into each of Sockets (N).
15. Restore power to outlet box and check operation of fixture.
16. Assembly is complete.

## CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.

### ATTENTION: ADJUSTING THE HANG HEIGHT

Any adjustments or alterations to the fixture, cord, or overall hang height that differ from those detailed on RH.com will void the Laboratory Listing and Approvals (UL, ETL, CSA, etc.). If the listing is voided, this means the product may no longer be safe for use as modified. RH does not recommend modifying the product.