

CABRETTE MOBILE LINEAR CHANDELIER 60", 72"

ASSEMBLY AND INSTALLATION INSTRUCTIONS ENGLISH

# CABRETTE MOBILE LINEAR CHANDELIER 60", 72"

# PARTS INCLUDED

(A) Wire Nuts (3) (B)

Mounting Plate (1) (C)

Mounting Loop (1) (D)

Mounting Screws (2) (E)

Quick Link (1)

(F) Hanging Loop (1)

(G) Canopy (1)

(H) Collar Ring (1)


(I) Pole (1)

(J) Fixture Body (1)

(K) Shade Holders (6)

(L) Bulbs (6)

(M) Shades (6) (packaged separately)

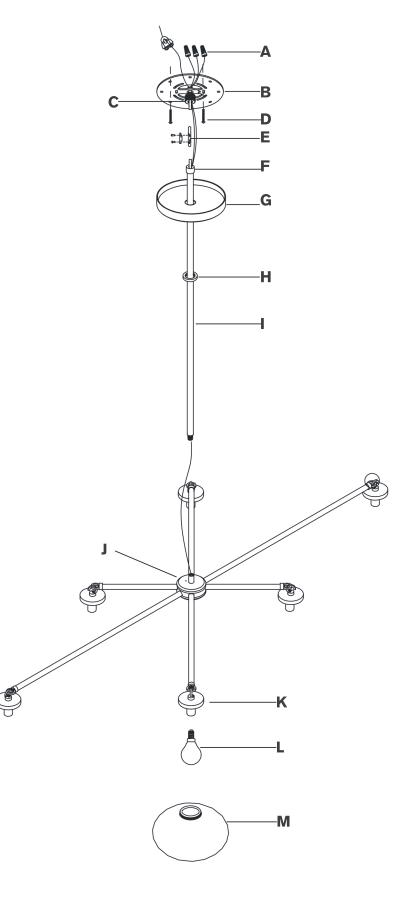

# IMPORTANT: PLEASE READ

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING DIRECTLY TO A JUNCTION BOX. UNIQUE OR ALTERNATIVE INSTALLATION METHODS MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

### IMPORTANT SAFETY FEATURES

### BULBS

This fixture has been rated for 6 (six) 25-watt maximum Type G incandescent lightbulbs or 6 (six) 5.5-watt maximum LED lightbulbs. To avoid the risk of fire, do not exceed the recommended wattage.

# DIMMER SWITCH COMPATIBILITY

This fixture is dimmer-switch compatible and may be used with either a forward-phase or reverse-phase dimmer switch.

# WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off the fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when the fixture is illuminated. Keep flammable materials away from lit bulb.

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm.

For more information, go to www.P65Warnings.ca.gov.


# WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

### **INSTALL SAFETY CABLE:**

- Run the safety cable through the junction box and around a structur member of the building.
- 2. Wrap the safety cable around the saddle (a), and secure with u-bolt (b) and hex nuts (c). See the diagram below.





#### ASSEMBLY AND INSTALLATION

# SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

- Carefully remove all parts from the box and remove all plastic coverings. Place on a clean, soft surface.
- 2. Remove Mounting Plate (B) from Canopy (G) by unscrewing Collar Ring (H).
- 3. Install Mounting Plate (B) to the ceiling junction box and secure with Mounting Screws (D).
- 4. Feed the wire(s) through Pole (I), then connect Pole (I) to Fixture Body (J).
- Hold Fixture Body (J) upright. Slide Collar Ring (H) and Canopy
  (G) down Pole (I), and rest on Fixture Body (J). NOTE: Slide components down slowly to avoid damages.
- Cut the excess wire(s). Be sure to leave enough to reach the ceiling junction box.
- Open Quick Link (E) by loosening the pre-installed screws and take out the small tab. Connect Hanging Loop (F) to Mounting Loop (C) using Quick Link (E). Close Quick Link (E) by replacing the small tab and pre-installed screws.
- 8. Connect the safety cable as shown in the diagram on the previous page.
- 9. Wrap the fixture ground wire (bare copper) around the green grounding screw and tighten. Connect the end of the fixture ground wire to the supply ground wire (usually green or bare copper) using a Wire Nut (A). NOTE: It is imperative that the fixture is properly grounded.
- 10. Connect the fixture neutral wire (ribbed) to the supply neutral wire (usually white) using a Wire Nut (A).
- Connect the fixture hot wire (smooth with markings) to the supply hot wire (usually black) using a Wire Nut (A). CAUTION:
   Do not reverse the hot and neutral connections or safety will be compromised.
- 12. Make sure all wire connections are tight, then carefully tuck them into the junction box.
- 13. Install Canopy (G) to Mounting Plate (B), and secure with Collar Ring (H).

- 14. Insert Bulbs (L) into each of the sockets.
- Screw Shades (M) (packaged separately) into Shade Holders (K).
- 16. Assembly is complete.

# ATTENTION: ADJUSTING THE HANG HEIGHT

Any adjustments or alterations to the fixture, cord, or overall hang height that differ from those detailed on RH.com will void the Laboratory Listing and Approvals (UL, ETL, CSA, etc.). If the listing is voided, this means the product may no longer be safe for use as modified. RH does not recommend modifying the product.

## CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.