



CABRETTE ROUND CHANDELIER 60"

ASSEMBLY & INSTALLATION INSTRUCTIONS


ENGLISH

CABRETTE ROUND CHANDELIER 60" ENGLISH

CABRETTE ROUND CHANDELIER 60"

PARTS INCLUDED

- (A) Wire Nuts (3)
- (B) Mounting Plate (1)
- (C) Mounting Screws (2)
- (D) Mounting Loop (1)
- (E) Quick Link (1)
- (F) Hanging Loop (1)
- (G) Canopy (1)
- (H) Canopy Ring (1)
- (I) Connection Rod (1)
- (J) Fixture Body (1)
- (K) Shade Holders (31)
- (L) Bulbs (31)
- (M) Shades (31) (packed separately)

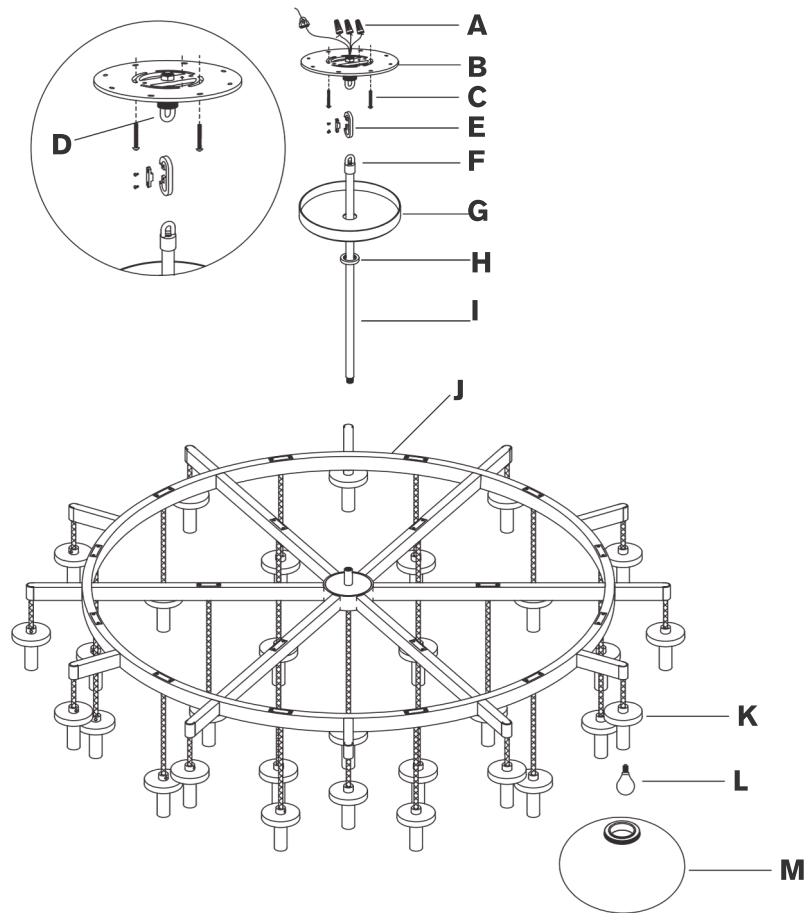

CABRETTE ROUND CHANDELIER 60" ENGLISH

IMPORTANT: PLEASE READ

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING DIRECTLY TO A JUNCTION BOX. UNIQUE OR ALTERNATIVE INSTALLATION METHODS MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

IMPORTANT SAFETY FEATURES

BULBS

This fixture has been rated for up to thirty-one (31) 25-watt maximum Type G incandescent lightbulbs or thirty-one (31) 5.5-watt SLED lightbulbs. To avoid the risk of fire, do not exceed the recommended wattage.

VAULTED CEILING COMPATIBILITY

This fixture is vaulted-ceiling compatible, up to a maximum ceiling slope of 20 degrees.

DIMMER SWITCH COMPATIBILITY

This fixture is dimmer-switch compatible, and may only be used with a forward-phase dimmer switch.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulbs. Do not touch or look directly at the bulbs when fixture is illuminated. Keep flammable materials away from lit bulbs.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

WARNING: STRANGULATION HAZARD


Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.
THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

CEILING REINFORCEMENT

Fixtures weighing 50 lbs. or more will require additional reinforcement above the ceiling where they are to be installed.

INSTALL SAFETY CABLE:

1. Run safety cable through junction box and around structural member of building.
2. Wrap the safety cable around the saddle (a), and secure with u-bolt (b) and hex nuts (c).

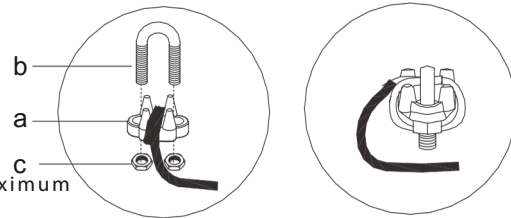

CABRETTE ROUND CHANDELIER 60" ENGLISH

ASSEMBLY AND INSTALLATION

**SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM
THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Carefully remove all parts from the box and remove plastic coverings.
2. Remove Mounting Plate (B) from Canopy (G) by removing Canopy Ring (H).
3. Install Mounting Plate (B) to the ceiling outlet box and secure with Mounting Screws (C) or other proper fasteners from your local hardware store.
4. Feed wires through Connection Rod (I), then connect to Fixture Body (J) until tight.
5. Slide Canopy Ring (H) and Canopy (G) down on Connection Rod (I) and rest on Fixture Body (J). NOTE: Slide components down slowly to avoid damages.
6. Open Quick Link (E) by loosening pre-installed set screws and take out the small tab. Connect Hanging Loop (F) to Mounting Loop (D) using Quick Link (E), then close Quick Link (E) by replacing the small tab and pre-installed set screws.
7. Connect the safety cable as shown in the diagram on the previous page.
8. Wrap fixture ground wire (bare copper) around the green grounding screw and tighten. Continue feeding fixture ground wire and connect to supply ground wire (usually green or bare copper) using a Wire Nut (A). NOTE: It is imperative that the fixture is grounded.
9. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using a Wire Nut (A).
10. Connect fixture hot wire (smooth with marking) to the supply hot wire (usually black) using a Wire Nut (A). CAUTION: Do not reverse the hot and neutral connections.
11. Make sure all wire connections are tight, then carefully tuck into the junction box.
12. Install Canopy (G) to Mounting Plate (B) and secure with Canopy Ring (H).
13. Install Bulbs (L) into each of the sockets.
14. Thread top of Shades (M) (packed separately) onto each of Shade Holders (K).
15. Installation is complete. Turn on power at fuse or circuit breaker.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe with a dry cloth.