


HEMISPHERE PENDANT  
ASSEMBLY & INSTALLATION INSTRUCTIONS  
**ENGLISH**

## HEMISPHERE PENDANT

### PARTS INCLUDED

- (A) Mounting Plate (1)
- (B) Mounting Screws (2)
- (C) Wire Nuts (3)
- (D) Strain Relief (1)
- (E) Screw (1)
- (F) Allen Wrench (1)
- (G) Screwdriver (1)
- (H) Set Screws (3)
- (I) Canopy (1)
- (J) Collar (1)
- (K) Socket (1)
- (L) Shade (1)
- (M) Bulb (1)

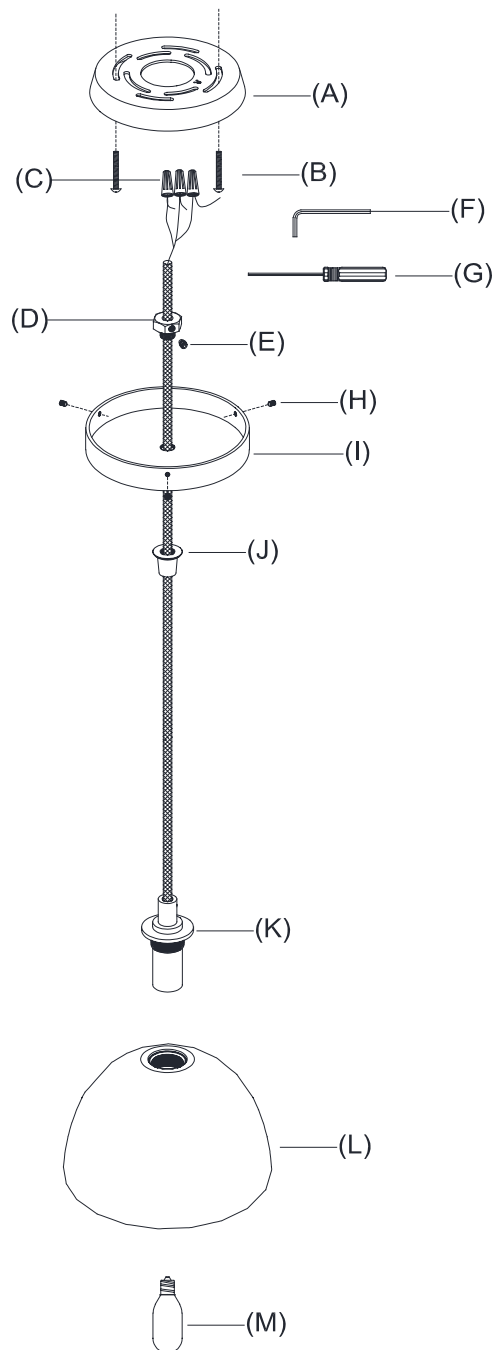

**IMPORTANT: PLEASE READ**

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING DIRECTLY TO A JUNCTION BOX. UNIQUE, OR ALTERNATIVE, INSTALLATION TYPES MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

**IMPORTANT SAFETY FEATURES****BULBS**

This fixture has been rated for up to one (1) 40-watt maximum Type T incandescent lightbulb or up to one (1) 5.5-watt maximum SBLED lightbulb. To avoid the risk of fire, do not exceed the recommended wattage.

**VAULTED CEILING COMPATIBILITY**

This fixture is vaulted-ceiling compatible up to a maximum ceiling slope of 20 degrees.

**DIMMER SWITCH COMPATIBILITY**

This fixture is dimmer-switch compatible and may only be used with a forward-phase dimmer switch.

**WARNINGS**

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



**WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

**THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.**

**ASSEMBLY AND INSTALLATION****SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

- Carefully remove all parts from the box and remove all plastic coverings.
- Remove Mounting Plate (A) from Canopy (I) by removing Set Screws (H) using Screwdriver (G).
- Install Mounting Plate (A) to the ceiling junction box and secure with Mounting Screws (B).
- Remove Collar (J) from Strain Relief (D). Feed the cord through Collar Ring, Canopy (I), and Strain Relief (D).
- Adjust cord to the desired height, then tighten Screw (E) using Allen Wrench (F).
- Screw Collar (J) into Strain Relief (D).
- Cut the extra wires. Be sure to have enough wire left to reach the junction box.
- Wrap fixture ground wire (bare copper) around the green grounding screw and tighten. Continue feeding fixture ground wire and connect it to the supply ground wire (usually green or bare copper) using a Wire Nut (C).  
NOTE: It is imperative that the fixture is properly grounded.
- Connect fixture neutral wire (white) to the supply neutral wire (usually white) using a Wire Nut (C).
- Connect fixture hot wire (black) to the supply hot wire (usually black) using a Wire Nut (C).  
CAUTION: Do not reverse the hot and neutral connections or safety will be compromised.
- Make sure all wire connections are tight, then carefully tuck them into the junction box.
- Install Canopy (I) to Mounting Plate (A) and secure with Set Screws (H) using Screwdriver (G).
- Screw Shade (L) into Socket (K).
- Install Bulb (M) into Socket (K).
- Restore power to outlet box and check operation of fixture.
- Assembly is complete.

**CARE INSTRUCTIONS**

Do not use polishes or cleaners on the fixture.  
Wipe clean with a soft, dry cloth.