

FULL CUTOFF WALL PACK

DESCRIPTION Combined with a comprehensive variety of battery backup, controls, and other options to meet your specification or building code and available in two sizes, full cutoff wall pack is designed for perimeter illumination for safety, security and identity. Units have protective polyester finish for long lasting appearance. Ideal for schools, factories, hospitals, warehouses and retail applications.

SPECIFICATION FEATURES

Construction

- Rugged cast-aluminum housing with bronze polyester powder paint for outdoor applications.
- Casting thermally conducts LED heat to optimize performance and long life.
- The design with zero uplight meets the requirements of dark sky.

Optics

- Switchable color temperature 3000K/4000K/5000K.
- Adjustable lumen output with four lumen settings 100%, 80%, 60%, 40%.
- Scalable Lumen Packages from 4,100 to 20,000 Lumens.
- Tempered UV coated flat lens provide outstanding performance, uniformity and glare control.

Electrical

- Universal 120-277 VAC or 120-347VAC input voltage.
- 0-10V dimming standard for a dimming range of 100% to 10%.
- Both drivers have a power factor >90%, THD <20%, 6KV surge protection.
- Operating Temperature Range: -40°C to 45°C (-40°F - +113°F).

Note: Operating with emergency battery temperature range: 5°C to 45°C (+41°F - +113°F).

Controls

- Optional Occupancy sensor, Microwave sensor, Multifunction Sensor or daylight sensor.
- Optional Bluetooth sensor or Bluetooth controller.
- Silvar Luminaire Level Lighting Control (LLLC) optional
- Sharkard Luminaire Level Lighting Control (LLLC) optional.
- Haisen Luminaire Level Lighting Control (LLLC) optional.
- Also compatible with 3rd party smart network control system.
- High End Trim

Lifespan

- Estimated 50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

Warranty

- Five-year limited warranty.

Certifications

- UL cUL wet location listed.
- DesignLights Consortium™ Qualified.

Note: DesignLights Consortium™ Qualified and classified for DLC Premium (all lumen packages), refer to www.designlights.org for details.

Note

- Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C(+5°C) specifications subject to change without notice.


Bluetooth



Large Size 135W

Medium Size 70W & 125W

PHOTOMETRICS

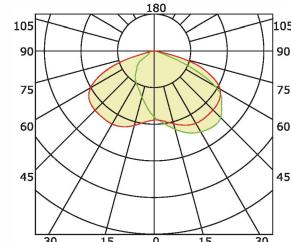

ACCESSORIES



Photocell

USE: Photocell can be pre-installed in factory.



PIR Sensor, 120-277V

USE: Sensor can be pre-installed in factory or field installed



Emergency Battery Backup

Description: It can be pre-installed in factory or field installed 8W 900lm 90min Only suitable for 70W/135W.




CCT and Wattage controller

Description: Allowing the contractor to set the lumen value and CCT of the fixture at the installation site.



CCT AND WATTAGE CONTROLLER

This fixture has the function of adjusting the lumens output and color temperature on-site.

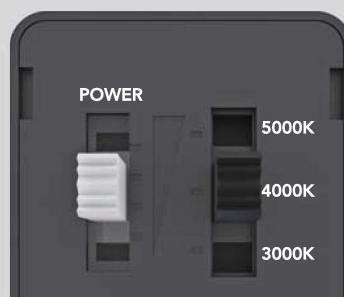

Wattage selectable: 100%, 80%, 60%, 40%
CCT selectable: 3000K, 4000K, 5000K

PERFORMANCE DATA

70W

SWITCH SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	70W	70	9800lm	140lm/W	11000lm	157lm/W	10200lm	146lm/W
80%	56W	70	8200lm	146lm/W	9100lm	163lm/W	8700lm	155lm/W
60%	42W	70	6400lm	152lm/W	7000lm	167lm/W	6800lm	162lm/W
40%	28W	70	4400lm	157lm/W	4800lm	171lm/W	4700lm	168lm/W

125W

SWITCH SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	125W	70	17100lm	137lm/W	19000lm	152lm/W	18000lm	144lm/W
80%	100W	70	14200lm	142lm/W	15700lm	157lm/W	15000lm	150lm/W
60%	75W	70	11000lm	147lm/W	12100lm	161lm/W	11700lm	156lm/W
40%	50W	70	7600lm	152lm/W	8200lm	164lm/W	8100lm	162lm/W

135W

SWITCH SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	135W	70	18000lm	133lm/W	20000lm	148lm/W	19000lm	141lm/W
80%	108W	70	15000lm	139lm/W	16400lm	152lm/W	15600lm	144lm/W
60%	81W	70	11600lm	143lm/W	12600lm	156lm/W	12000lm	148lm/W
40%	54W	70	8000lm	148lm/W	8600lm	159lm/W	8200lm	152lm/W


ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	1050	70	120	0.58
		70	208	0.34
		70	240	0.29
		70	277	0.25
		70	347	0.20
1	1100	125	120	1.04
		125	208	0.60
		125	240	0.52
		125	277	0.45
		125	347	0.36
1	1150	135	120	1.13
		135	208	0.65
		135	240	0.56
		135	277	0.49


DIMENSIONS

unit: mm/inch

Medium Size:
70W&125W

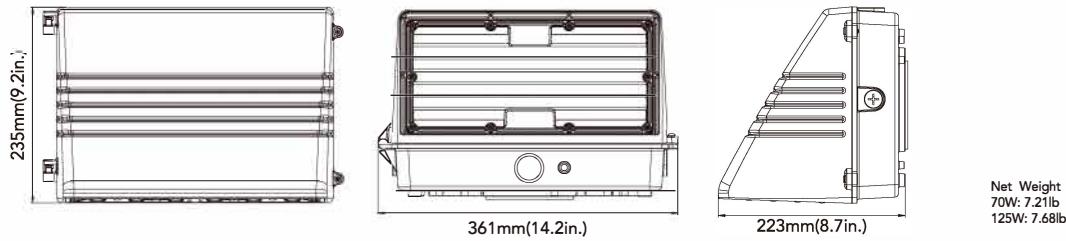

Large Size:
135W

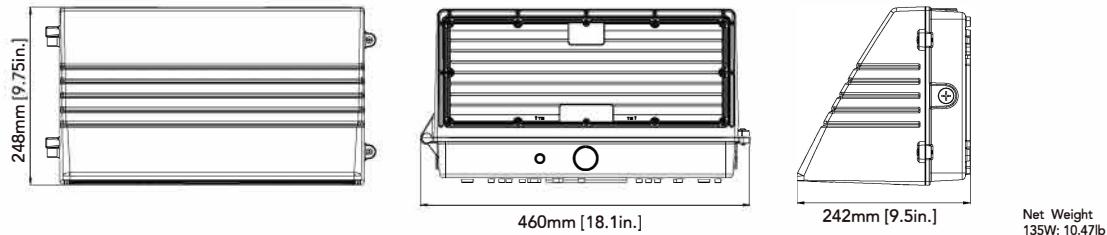

ORDERING GUIDE

Fixture Type	Wattage	Voltage	CCT	Finish	Photocell (Option)	Sensor (Option)	Emergency Battery (Option)	CCT and Power Adjustable	Internal Code
Wall Pack Series	70 70W 125 125W 135 135W	27V 120-277V 24V 120-347V	DDK Adjustable color temperature	D Dark Bronze B Black W White	P0 120-277V Photocell Blank Without Photocell	M With Sensor Blank Without Sensor	B Emergency Battery Blank Without Emergency Battery	AD With adjustment dial	Blank Alphanumeric

Note: 1. The 135W is not suit for 120-347V.

2. The 125W is not suit for Emergency battery.

círc
Lighting