

LED TEMPORARY WORK LIGHT

Outstanding lighting quality
Convenient & professional
No fan Passive cooling solution
360 degree Beam Angle lighting
Energy saving, long lifespan

Features

150W available
Efficient heat dissipation
Plug-n-Play design
On-off controller
ETL Approved
150LM/W SMD2835 Chips
5 years warranty
AC100~277V, 50~60Hz
360 degree Beam Angle
6KV high voltage surge protection
Suitable for dry and damp locations
Hollow heatsink increase air flow
No magnetic disturbance driver design



On-off controller






Hollow heatsink
increase air flow


Applications

LED Temporary Work Light series can be widely used in warehouses, wharf, factories and workshops, highway toll stations, gas stations, mine, etc.

Series	Lumens	Base	Beam Angle (Degree)	Electrical Data	LED Type	Color temperature	Color rendering index
TWL-60W	8700LM 8,700 lumens	3 pin wires	360 degree	Input Voltage 100-277V 50~60Hz Power Factor(%) >90	SMD2835 chips	WW 2800~3000 K NW 4000~4500 K DW 5000~5500 K CW 6000~6500 K	80 80 CRI
TWL-80W	11600LM 11,600 lumens	3 pin wires					
TWL-100W	14500LM 14,500 lumens	3 pin wires					
TWL-125W	18125LM 18,125 lumens	3 pin wires					
TWL-150W	21750LM 21,750 lumens	3 pin wires					

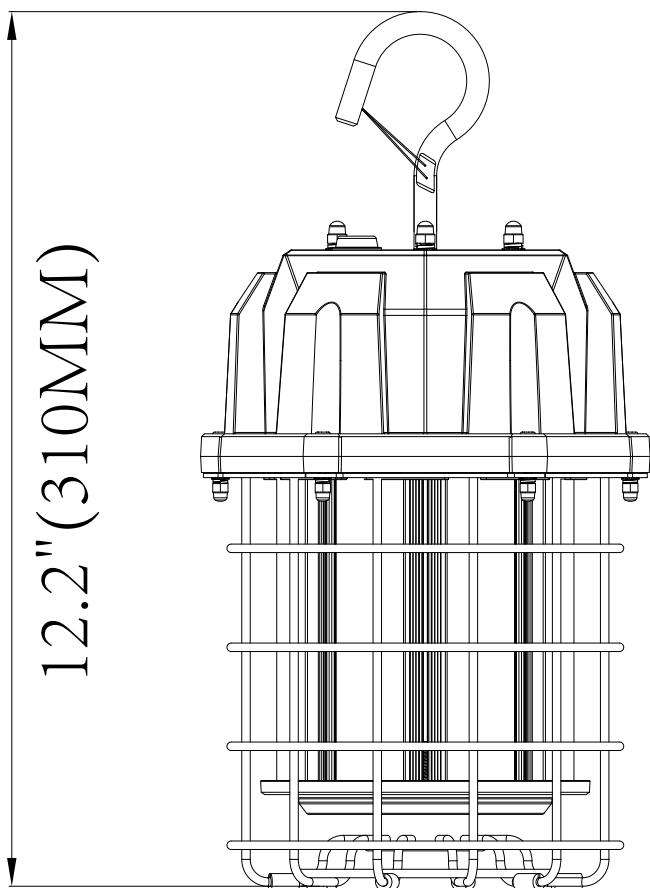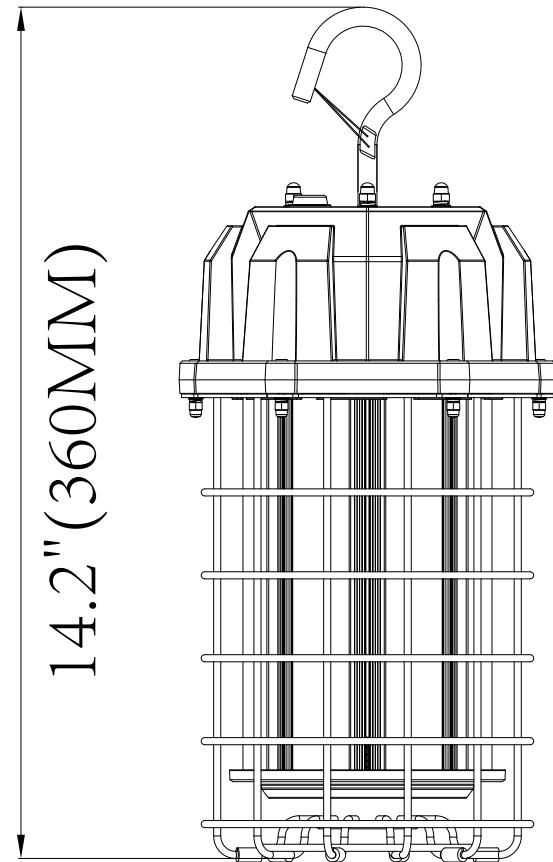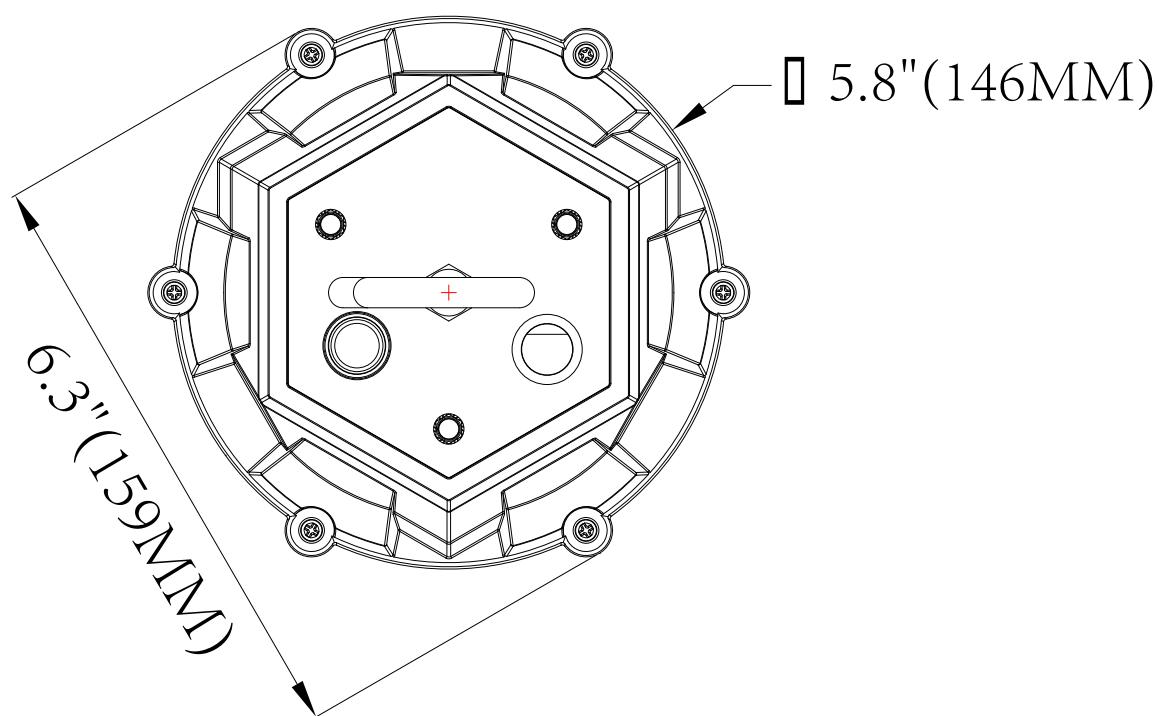**60W,80W****100W,125W,150W****60W,80W,100W,120W,150W**

Light Source Test Report

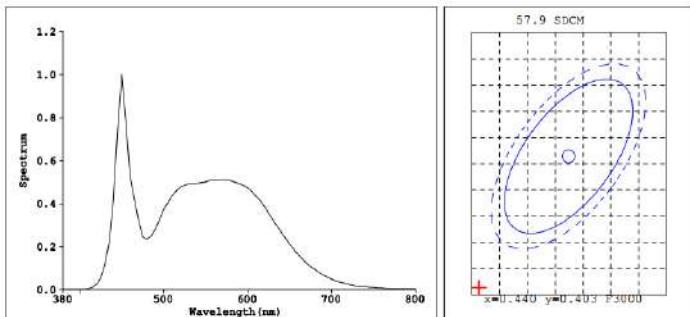

Color Parameters:

Chromaticity Coordinate: $x=0.3281$ ($dx=-0.0002$) $y=0.3504$ ($dy=0.0129$)
 Chromaticity Coordinate: $u'=0.2004$ $v'=0.4816$ ($duv=6.67e-03$)
 $Tc=5687K$ Dominant WL:Ld=535.4nm Purity=3.8% Centroid WL:546.0nm
 Ratio: R=15.4% G=80.0% B=4.6% Peak WL:Lp=450.0nm HWL:20.0nm
 Render Index: Ra=82.7
 R1 = 80 R2 = 87 R3 = 93 R4 = 83 R5 = 81 R6 = 83 R7 = 88
 R8 = 67 R9 = 2 R10 = 70 R11 = 82 R12 = 59 R13 = 82 R14 = 96 R15 = 74

Photo Parameters:

Flux: 8718 lm Fe: 23.152 W Efficacy: 145.7 lm/W
 WHITE: ANSI_5700K


Electrical Parameters:

Lamp : U=223.7V I=0.2280A P=59.90W PF=0.9800

Instrument Status:
 Scan Range: 380.0nm-800.0nm Interval: 5.0nm [0] REF=14279 (R=3) $\pm=0.741\%$ IP=13246 (G=3, D=54) PMT: 27.0 centigrade [26.7]

60W

Light Source Test Report

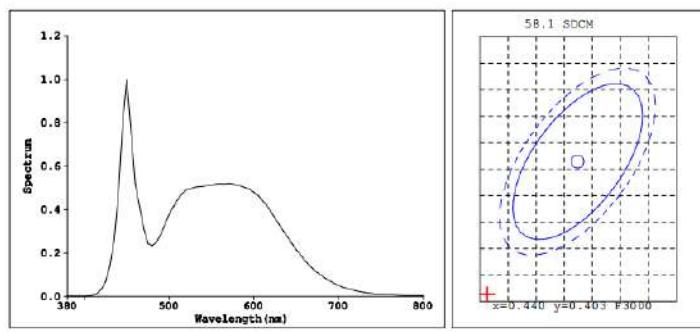

Color Parameters:

Chromaticity Coordinate: $x=0.3275$ ($dx=-0.0003$) $y=0.3498$ ($dy=0.0128$)
 Chromaticity Coordinate: $u'=0.2002$ $v'=0.4812$ ($duv=6.61e-03$)
 $Tc=5712K$ Dominant WL:Ld=531.8nm Purity=3.5% Centroid WL:545.0nm
 Ratio: R=15.3% G=80.1% B=4.5% Peak WL:Lp=450.0nm HWL:20.4nm
 Render Index: Ra=82.5
 R1 = 80 R2 = 86 R3 = 92 R4 = 83 R5 = 81 R6 = 82 R7 = 88
 R8 = 67 R9 = 1 R10 = 69 R11 = 82 R12 = 60 R13 = 81 R14 = 96 R15 = 74

Photo Parameters:

Flux: 10005.76 lm Fe: 34.811 W Efficacy: 130.16 lm/W
 WHITE: ANSI_5700K

Electrical Parameters:


Lamp : U=224.0V I=0.3720A P=79.30W PF=0.9520

Instrument Status:
 Scan Range: 380.0nm-800.0nm Interval: 5.0nm [0] REF=21395 (R=3) $\pm=-0.479\%$ IP=19520 (G=3, D=55) PMT: 27.0 centigrade [26.6]

80W

Light Source Test Report

Light Source Test Report

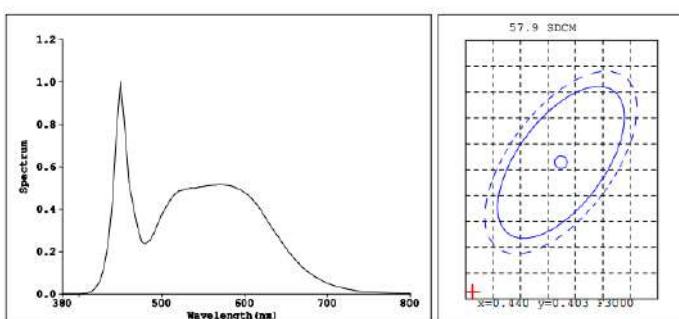

Color Parameters:

Chromaticity Coordinate: $x=0.3280$ ($dx=-0.0003$) $y=0.3500$ ($dy=0.0125$)
 Chromaticity Coordinate: $u'=0.2005$ $v'=0.4814$ ($duv=6.44e-03$)
 $Tc=5687K$ Dominant WL:Ld=534.6nm Purity=3.7% Centroid WL:546.0nm
 Ratio: R=15.4% G=80.0% B=4.6% Peak WL:Lp=450.0nm HWL:20.3nm
 Render Index: Ra=82.9
 R1 = 80 R2 = 87 R3 = 92 R4 = 83 R5 = 82 R6 = 83 R7 = 88
 R8 = 67 R9 = 2 R10 = 70 R11 = 83 R12 = 60 R13 = 82 R14 = 96 R15 = 74

Photo Parameters:


Flux: 12596.1 lm Fe: 41.041 W Efficacy: 133.82 lm/W
 WHITE: ANSI_5700K

Electrical Parameters:

Lamp : U=221.4V I=0.4230A P=90.50W PF=0.9620

Instrument Status:
 Scan Range: 380.0nm-800.0nm Interval: 5.0nm [0] REF=25211 (R=3) $\pm=0.667\%$ IP=23115 (G=3, D=55) PMT: 26.9 centigrade [26.8]

100W

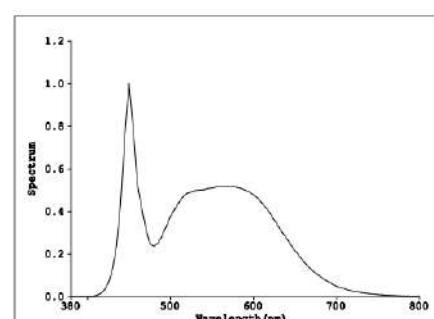

Color Parameters:

Chromaticity Coordinate: $x=0.3279$ ($dx=-0.0003$) $y=0.3500$ ($dy=0.0125$)
 Chromaticity Coordinate: $u'=0.2004$ $v'=0.4813$ ($duv=6.53e-03$)
 $Tc=5696K$ Dominant WL:Ld=533.9nm Purity=3.7% Centroid WL:546.0nm
 Ratio: R=15.4% G=80.0% B=4.6% Peak WL:Lp=450.0nm HWL:20.5nm
 Render Index: Ra=82.7
 R1 = 80 R2 = 87 R3 = 92 R4 = 83 R5 = 81 R6 = 83 R7 = 88
 R8 = 67 R9 = 2 R10 = 70 R11 = 82 R12 = 60 R13 = 82 R14 = 96 R15 = 74

Photo Parameters:

Flux: 15741.9 lm Fe: 52.703 W Efficacy: 133.48 lm/W
 WHITE: ANSI_5700K


Electrical Parameters:

Lamp : U=222.6V I=0.5440A P=117.7W PF=0.9710

Instrument Status:
 Scan Range: 380.0nm-800.0nm Interval: 5.0nm [0] REF=32343 (R=3) $\pm=0.698\%$ IP=29682 (G=3, D=55) PMT: 26.8 centigrade [26.6]

125W

Light Source Test Report

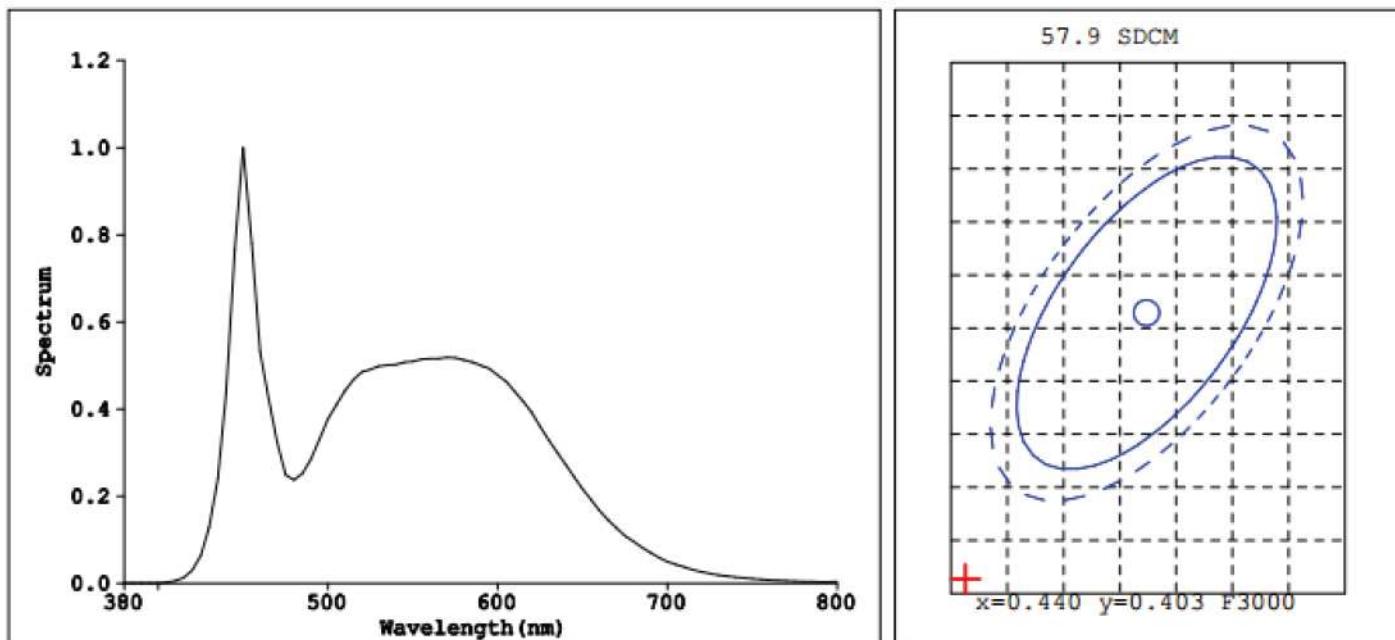

Color Parameters:

Chromaticity Coordinate: $x=0.3279$ ($dx=-0.0003$) $y=0.3500$ ($dy=0.0125$)

Chromaticity Coordinate: $u'=0.2004$ $v'=0.4813$ ($duv=6.53e-03$)

$T_c=5696K$ Dominant WL:Ld=533.9nm Purity=3.7% Centroid WL:546.0nm

Ratio: R=15.4% G=80.0% B=4.6% Peak WL:Lp=450.0nm HWL:20.5nm

Render Index: Ra=82.7

R1 =80	R2 =87	R3 =92	R4 =83	R5 =81	R6 =83	R7 =88
R8 =67	R9 =2	R10=70	R11=82	R12=60	R13=82	R14=96 R15=74

Photo Parameters:

Flux: 21745 lm Fe: 52.703 W Efficacy: 148.3 lm/W

WHITE:ANSI_5700K

Electrical Parameters:

Lamp : U=222.6V I=0.5440A P=146W PF=0.9710

Instrument Status:


Scan Range: 380.0nm-800.0nm Interval: 5.0nm [0]
REF=32343 (R=3) %=0.698%

$I_p=29682$ (G=3, D=55)
PMT: 26.8 centigrade [26.6]


150W


1. Take the LED Temporary Work Light with hook from the package.
2. Install the hook as illustrated in Figure.

Hooks and lamps must be firmly and reliably installed.

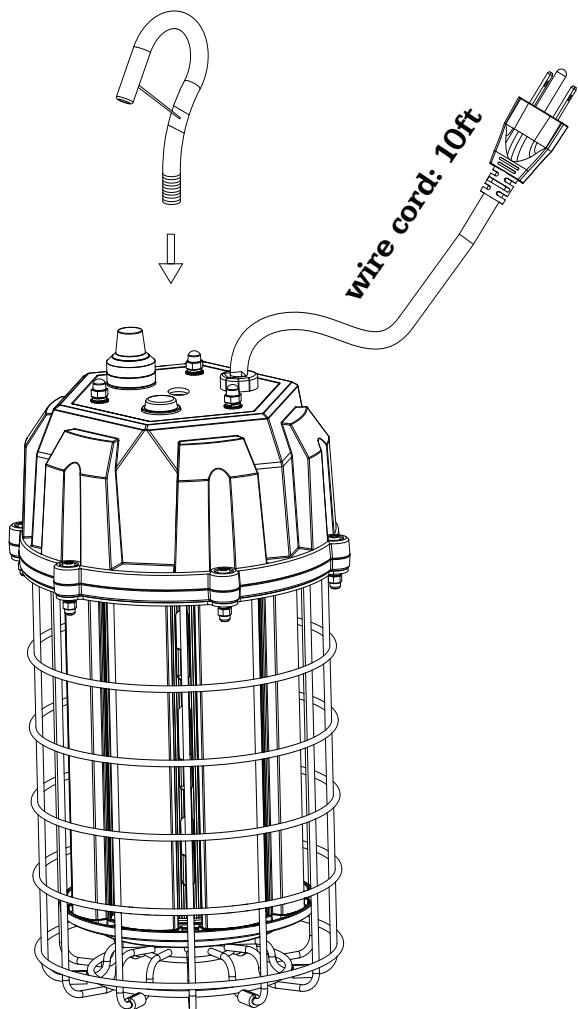

3. Install lamp hooks on reliable hooks or walls.

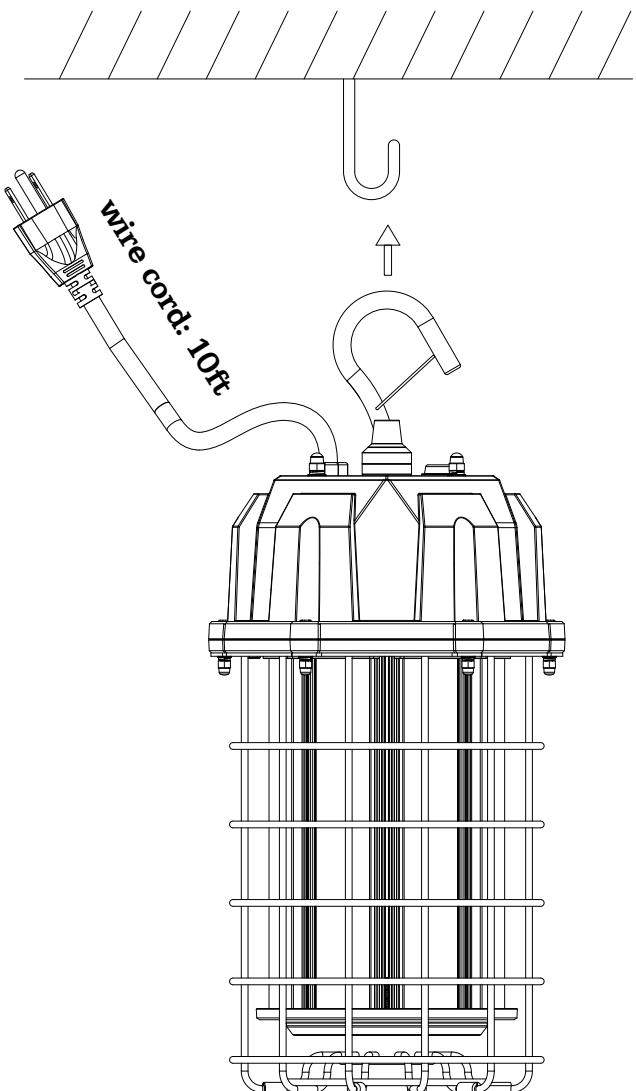

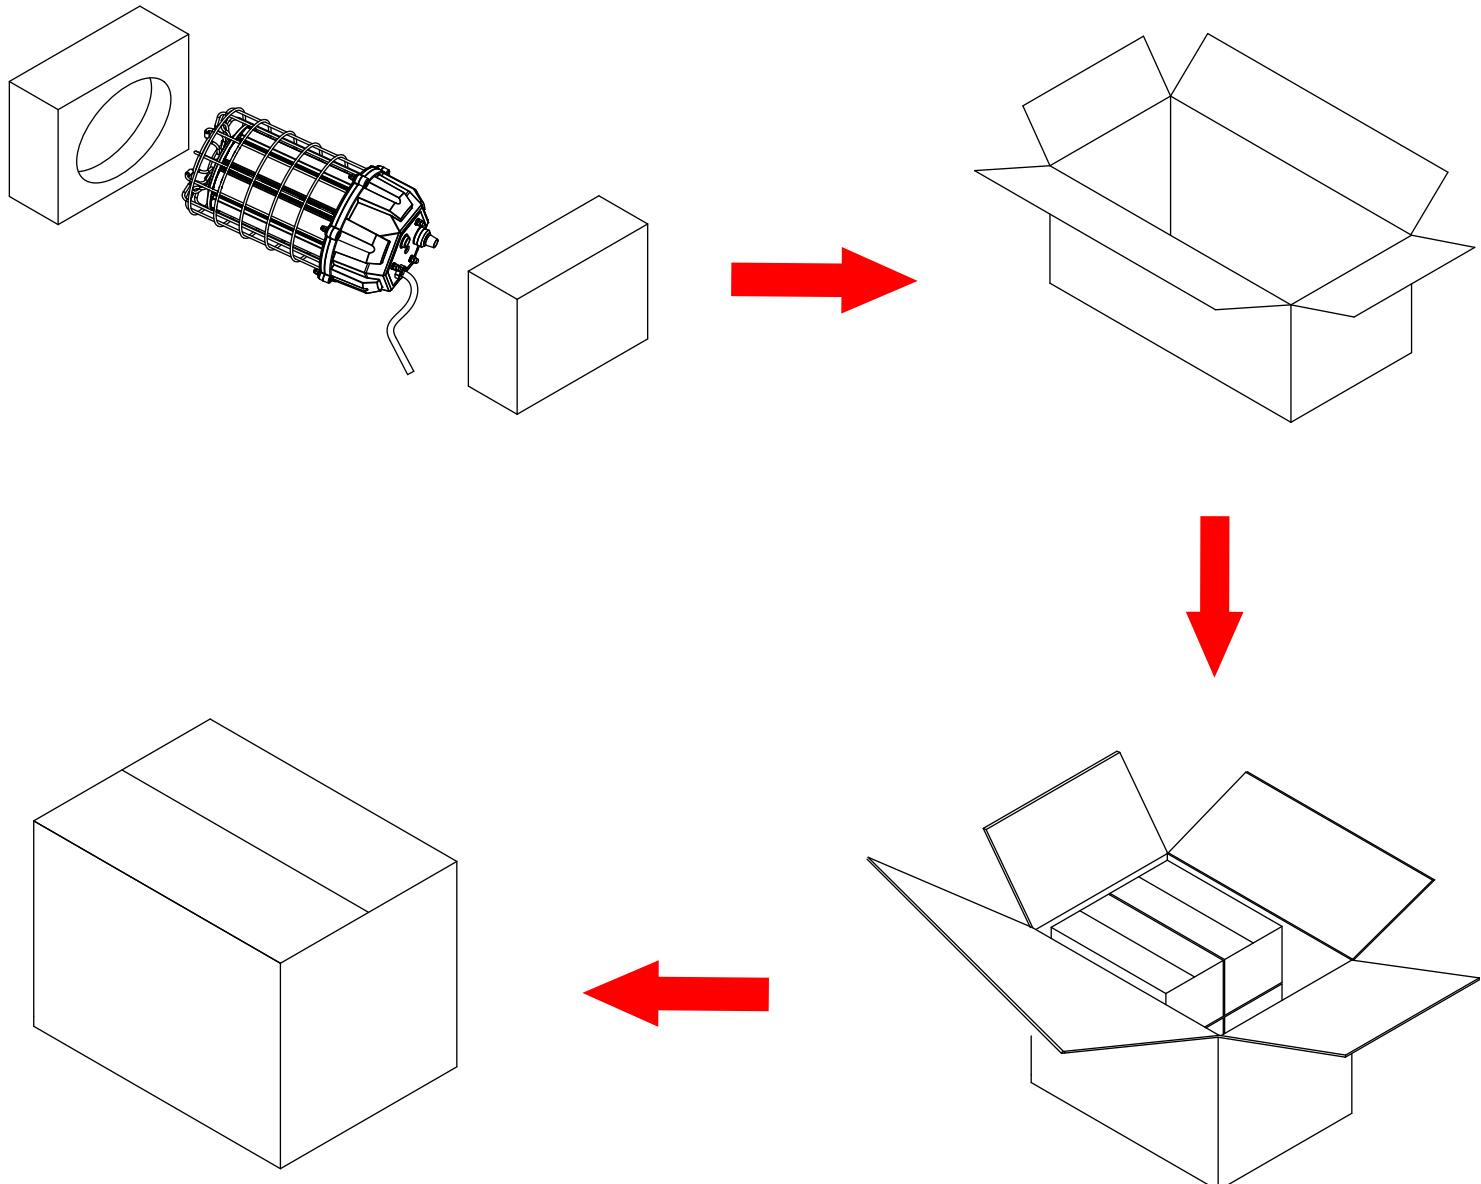

Series	Unit	Package Size	Gross weight
NG-TWL-60W NG-TWL-80W	1 Pcs	28.6*20.5*17.8CM	3 KG
	4Pcs	38*35*38 CM	12.8 KG
NG-TWL-100W NG-TWL-125W NG-TWL-150W	1Pcs	33.6*20.5*17.8CM	3.5 KG
	4Pcs	43*35*38 CM	14.8 KG

