


MACHINIST GLASS CYLINDER PENDANT 12"

PARTS ENCLOSED

- (A) Mounting Strap (1)
- (B) Nipple (1)
- (C) Mounting Loop (1)
- (D) Mounting Screws (2)
- (E) Closable Link (1)
- (F) Metal Cover (1)
- (G) Screws (2)
- (H) Hanging Loop (1)
- (I) 38" Extension Rod (1)
- (J) Canopy (1)
- (K) Canopy Ring (1)
- (L) 18" Extension Rods (2)
- (M) 12" Extension Rods (2)
- (N) 6" Extension Rods (2)
- (O) Connectors (6)
- (P) Threaded Joint (1)
- (Q) Thumbscrews (4)
- (R) Shade Holder (1)
- (S) Bulb (1)

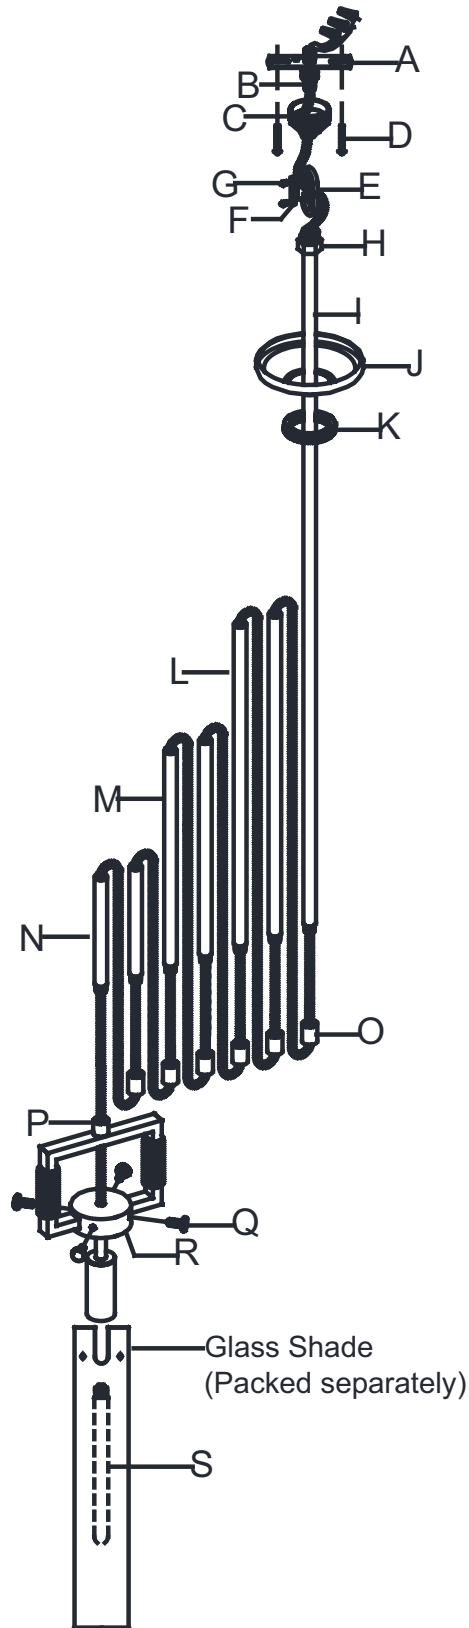

MACHINIST GLASS CYLINDER PENDANT 12"

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for up to one (1) 60-watt maximum Type T lightbulb (40-watt lightbulb), one (1) 13-watt compact fluorescent lightbulb or one (1) 9-watt SBLLED lightbulb. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.



WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

ASSEMBLY & INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Determine the hanging length of pendant. Connect some or all Connection Rods (I) (L) (M) (N) and Connectors (O) to Threaded Joint (P) according to the height needed.
3. Slide Canopy Ring (K), Canopy (J) onto 38" Connection Rod (I).
4. Attach Mounting Strap (A) to the ceiling outlet box and secure with Mounting Screws (D).

ASSEMBLY & INSTALLATION CONT.

5. Thread Mounting Loop (C) to Nipple (B) by turning in a clockwise direction.
6. Remove Metal Cover (F) from Closable Link (E) by removing Screws (G).
7. Hang the fixture and join Mounting Loop (C), Closable Link (E) and Hanging Loop (H) together. Secure by replacing Metal Cover (F) to Closable Link (E), then tighten with Screws (G).
8. Gently pull the wire from the ceiling outlet box and allow the wire to hang. Thread the wire through the center hole of Nipple (B).
9. Attach the fixture ground wire (green) and house ground wire (usually green or bare) to the ceiling outlet box with the green grounding screw. Connect fixtures to corresponding house wire with a wire nut. Carefully tuck the wires back into the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
10. Connect the neutral wire (white) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
11. Connect the hot wire (black) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
12. Raise Canopy (J) to the affixed Mounting Strap (A) and secure with Canopy Ring (K).
13. Remove Thumbscrews (Q) from Shade Holder (R). Attach the shade (sold separately) to Shade Holder (R) and secure by tighten Thumbscrews (Q). DO NOT OVER TIGHTEN OTHERWISE THE GLASS COULD BECOME DAMAGED.
14. Insert Bulb (S) into the socket.
15. Restore power to outlet box and check operation of fixture.
16. Assembly is complete.


CARE INSTRUCTIONS

Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.

MACHINIST GLASS CYLINDER PENDANT 22"

PARTS ENCLOSED

- (A) Mounting Strap (1)
- (B) Nipple (1)
- (C) Mounting Loop (1)
- (D) Mounting Screws (2)
- (E) Carabiner (1)
- (F) Metal Cover (1)
- (G) Screws (2)
- (H) Hanging Loop (1)
- (I) 38" Extension Rods (1)
- (J) Canopy (1)
- (K) Canopy Ring (1)
- (L) 18" Extension Rods (2)
- (M) 12" Extension Rods (2)
- (N) 6" Extension Rods (2)
- (O) Connectors (6)
- (P) Threaded Joint (1)
- (Q) Thumbscrews (4)
- (R) Shade Holder (1)
- (S) Bulb (1)

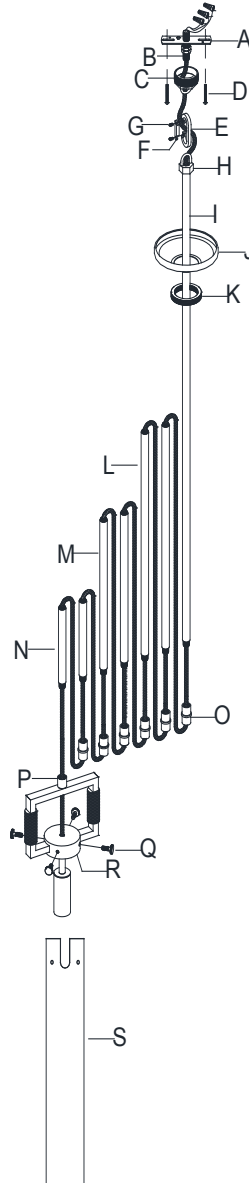

MACHINIST GLASS CYLINDER PENDANT 22"

IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

This fixture has been rated for up to one (1) 60-Watt maximum Type G30 lightbulb (S) (included) or one (1) 13-Watt compact fluorescent lightbulb (not included) or one (1) 9-Watt SBLED light bulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.



WARNING: STRANGULATION HAZARD

Keep cord at least 3 ft away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3.

ASSEMBLY & INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic covering.
2. Determine the hanging length of pendant. Connect some or all Connection Rods (I)(L)(M)(N) and Connectors (O) to the Threaded Joint (P) according to the height needed.
3. Slide Canopy Ring (K) and Canopy (J) onto the Connection Rod (I).

ASSEMBLY & INSTALLATION CONT.

4. Attach Mounting Strap (A) to ceiling outlet box and secure with Mounting Screws (D).
5. Thread Mounting Loop (C) to the Nipple (B) by turning in a clockwise direction.
6. Remove the Metal Cover (F) from Carabiner (E) by removing Screws (G).
7. Join Mounting Loop (C), Carabiner (E), and Hanging Loop (H) together. Hang pendant. Secure by replacing Metal Cover (F) to Carabiner (E). Tighten with Screws (G).
8. Gently pull the wire from ceiling outlet box and allow the wire to hang. Thread the wire through the center hole of Nipple (B).
9. Attach the fixture ground wire (GREEN) and house ground wire (usually green or bare wire) to wall outlet box with the green grounding screw. Connect fixtures to corresponding house wire with a wire nut. Carefully tuck the wires back into the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
10. Connect the neutral wire (WHITE) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
11. Connect the hot wire (BLACK) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
12. Raise Canopy (J) to the affixed Mounting Strap (A) and secure with Canopy Ring (K).
13. Insert Bulb (S) into the socket.
14. Remove Thumbscrews (Q) from Shade Holder (R). Attach Shade (A, B, or C) to Shade Holder (R) and secure by tightening Thumbscrews (Q). DO NOT OVERTIGHTEN.
15. Restore power to outlet box and check operation of fixture.
16. Assembly is complete.

CARE INSTRUCTIONS

Do not use polishes or cleaners on your lamp. Just wipe clean with a soft cloth.