




METIER TASK FLOOR LAMP
ASSEMBLY & INSTALLATION INSTRUCTIONS
UNITED STATES ENGLISH

METIER TASK FLOOR LAMP

PARTS INCLUDED

- (A) Lamp Arm (1)
- (B) Inner Pole (1)
- (C) Threaded Collar (1)
- (D) Lamp Pole (1)
- (E) Fixture Base (1)
- (F) Base Weight (1)
- (G) Washer (1)
- (H) Nut (1)
- (I) Bulb (1)
- (J) T-Wrench (1)
- (K) Allen Wrench (1)

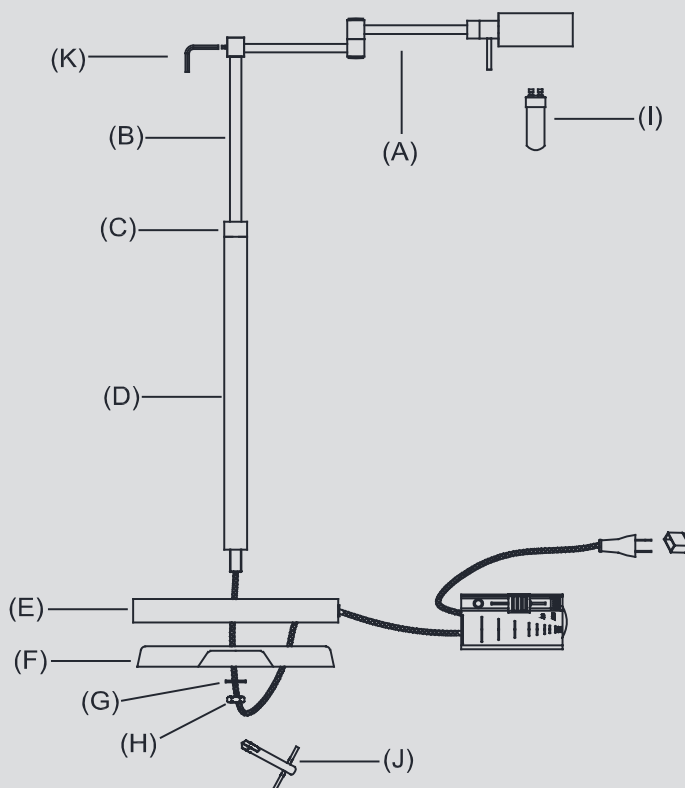

IMPORTANT: PLEASE READ

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING DIRECTLY TO A JUNCTION BOX. UNIQUE, OR ALTERNATIVE, INSTALLATION TYPES MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

IMPORTANT SAFETY FEATURES**BULBS**

This lamp has been rated for up to one (1) 5-watt maximum Type T LED lightbulb. To avoid the risk of fire, do not exceed the recommended wattage.

DIMMER SWITCH COMPATIBILITY

This lamp is dimmer-switch compatible and may only be used with a forward phase dimmer switch.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the lamp is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when lamp is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

ASSEMBLY AND INSTALLATION**SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.**

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Remove white plastic bushing from inside bottom opening of Lamp Pole (D) and top of Fixture Base (E) before assembling.
3. Join Lamp Pole (D), Fixture Base (E) and Base Weight (F) together. Slide Washer (G) over the threaded nipple which protrudes to the bottom of Base Weight (F). Screw Nut (H) onto the threaded nipple to secure Fixture Base (E) to Lamp Pole (D). Tighten using T-Wrench (J).
4. Pull the wire until tight.
5. Insert Bulb (I) into the threaded socket.
6. Plug into proper electrical outlet and test lamp.
7. Assembly is complete.


Adjustment:

1. Loosen Threaded Collar (C) in a counterclockwise direction.
2. Adjust lamp by pulling or pushing Inner Pole (B) up or down to the desired height.
3. Tighten Threaded Collar (C) in a clockwise direction or adjust the shade position by swinging Lamp Arm (A) if needed.


CARE INSTRUCTIONS

Do not use polishes or cleaners on the lamp. Wipe clean with a soft, dry cloth.


Fuse Replacement to FD-10A Foot Dimmer

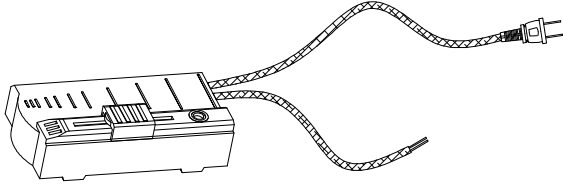

1. Unplug the cord with the Dimmer from the power outlet.

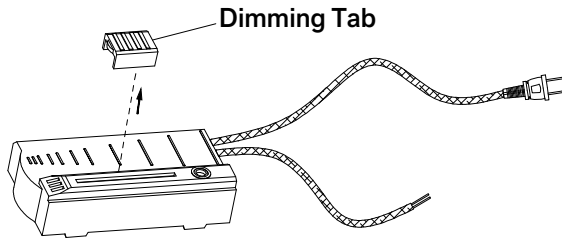


2. Pull out the Dimming Tab by hand.

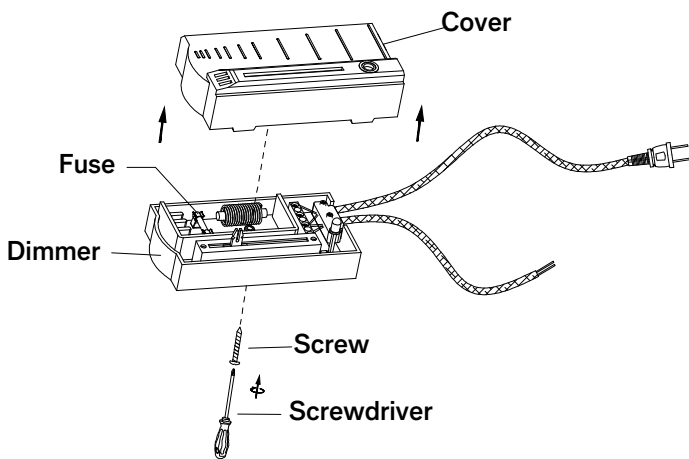

3. Remove the Screw from the back side of the Dimmer using a Screwdriver.

4. Gently pull off the Cover from the Dimmer.

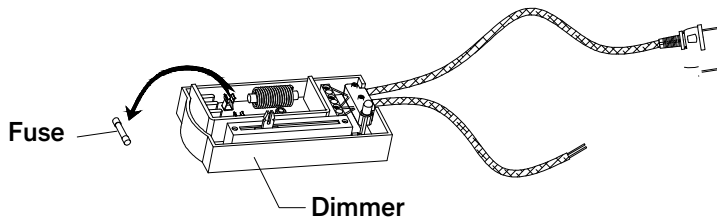

5. Carefully take out the existing Fuse.

6. Then install the replacement Fuse.

7. Close the Dimmer.