

## LED UFO PRO LIGHT

UFOPR-100WH      UFOPR-150WH  
UFOPR-200WH      UFOPR-240WH  
UFOPR-300WH

### Features

Super-Thin Aluminum heatsink  
Remote control 0~10V dimmable  
277-480VAC input  
SMD2835 LED Chips 150LM/W  
6K high Voltage Surge test approved  
120 Degree Beam Angle  
High Power Factor>0.9,Low THD Driver  
Excellent Heat Dissipation  
Energy Saving 50% At Least  
UL cUL DLC Approved  
5 Years Warranty  
EASY INSTALLATION  
WATERPROOF AND DURABLE  
SAVING ENERGY




### Applications


LED UFO PRO light series can be widely used in supermarket,garage,factory,workshops,highway toll station,gas station exhibition hall,commercial and industrial lighting etc.



Series	Lumens	Wiring	Beam Angle (Degree)	Electrical Data	LED Type	Color temperature	Color rendering index
UFOPR-100WH	15000Lm	ACL(Black) ACN(White) GND(Green)	120 degree	Input Voltage 277-480V 50~60Hz  Power Factor(%) >90	SMD 2835 Chips	WW 3000 K NW 4000 K DW 5000 K CW 5700 K	Ra>70 Ra>80 Ra>90
UFOPR-150WH	22500Lm						
UFOPR-200WH	30000Lm						
UFOPR-240WH	36000Lm						
UFOPR-300WH	45000Lm						

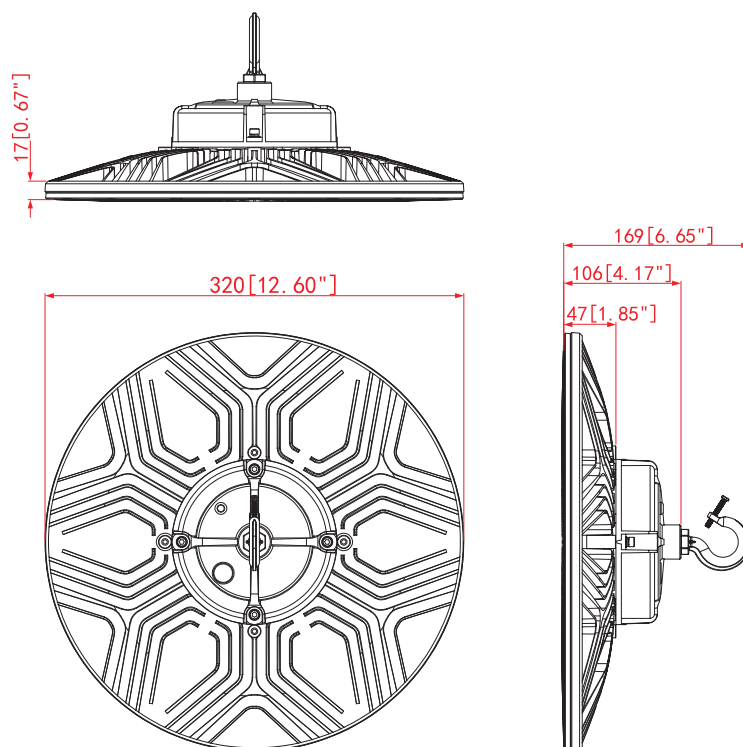


**100W/150W**

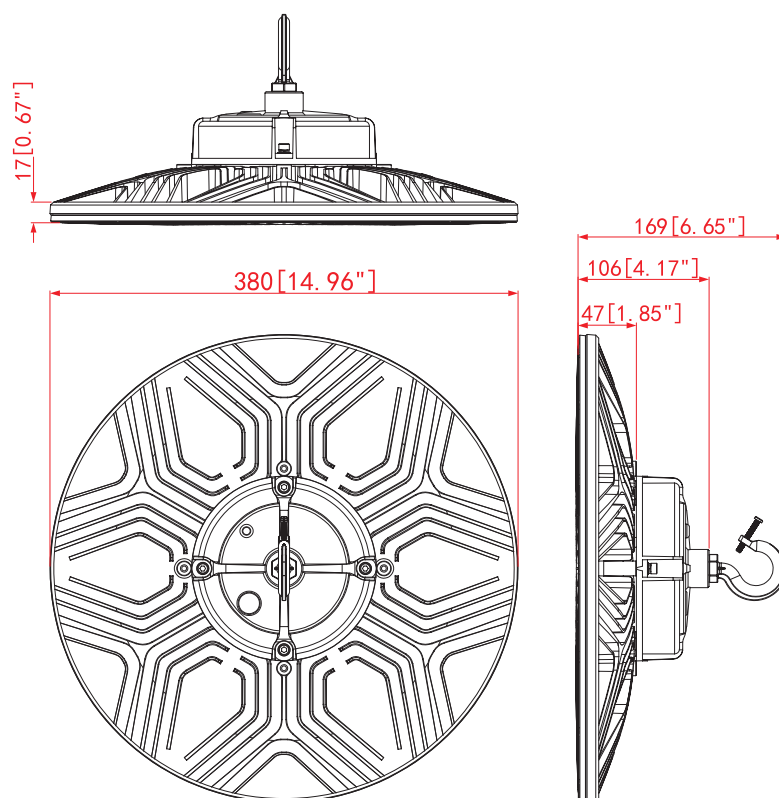


**200W/240W/300W**


1. Open the box and take out the LED light and ring.
2. Install the ring into the light body as following diagram.

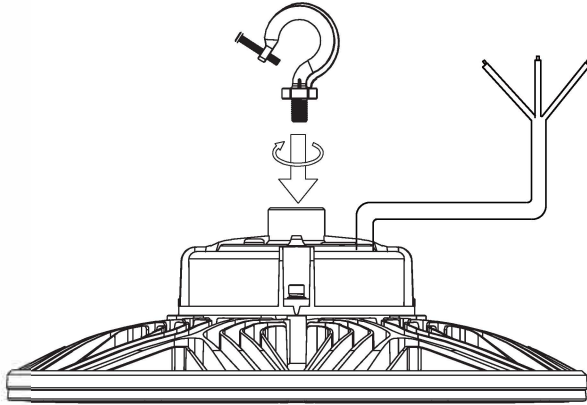

3. Hung the LED light with a sturdy hook.

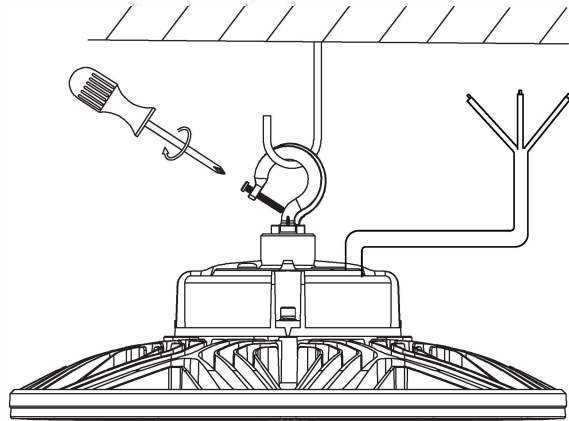

4. Hang the safety wire one side to the lamp, another side to the sturdy hook shown by diagram.

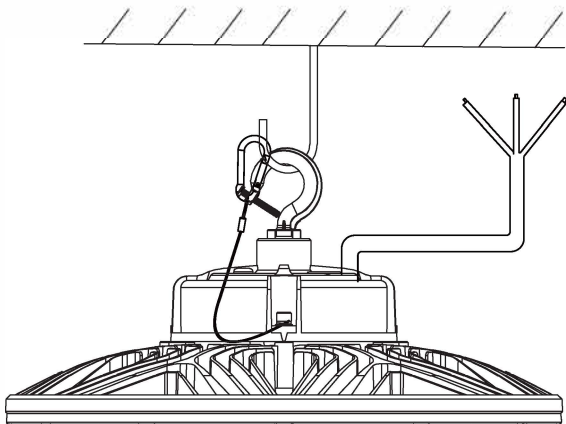


5. Connect wires as below diagram and turn on power to lighting.



Black wire : L


Green wire: 

White wire : N

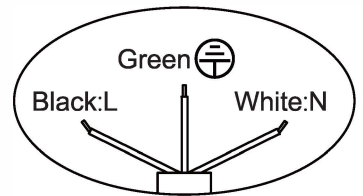

6. Use remote control to adjust product brightness, 0-100% adjustment. Or use microwave induction to intelligently adjust product functions.

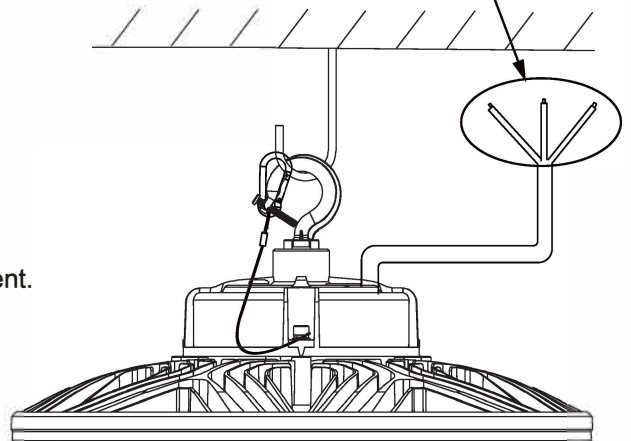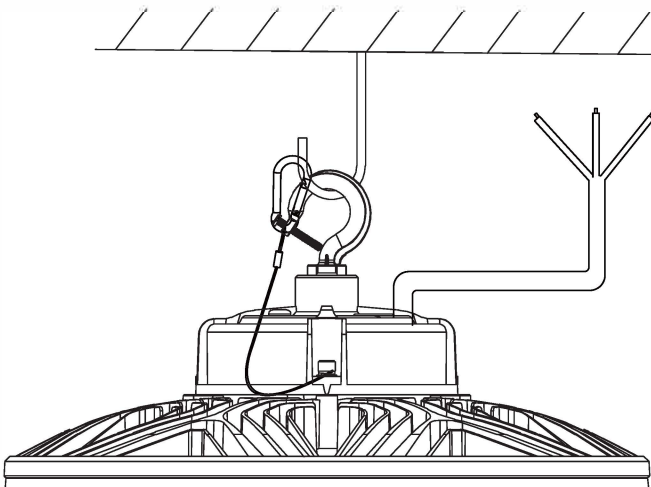

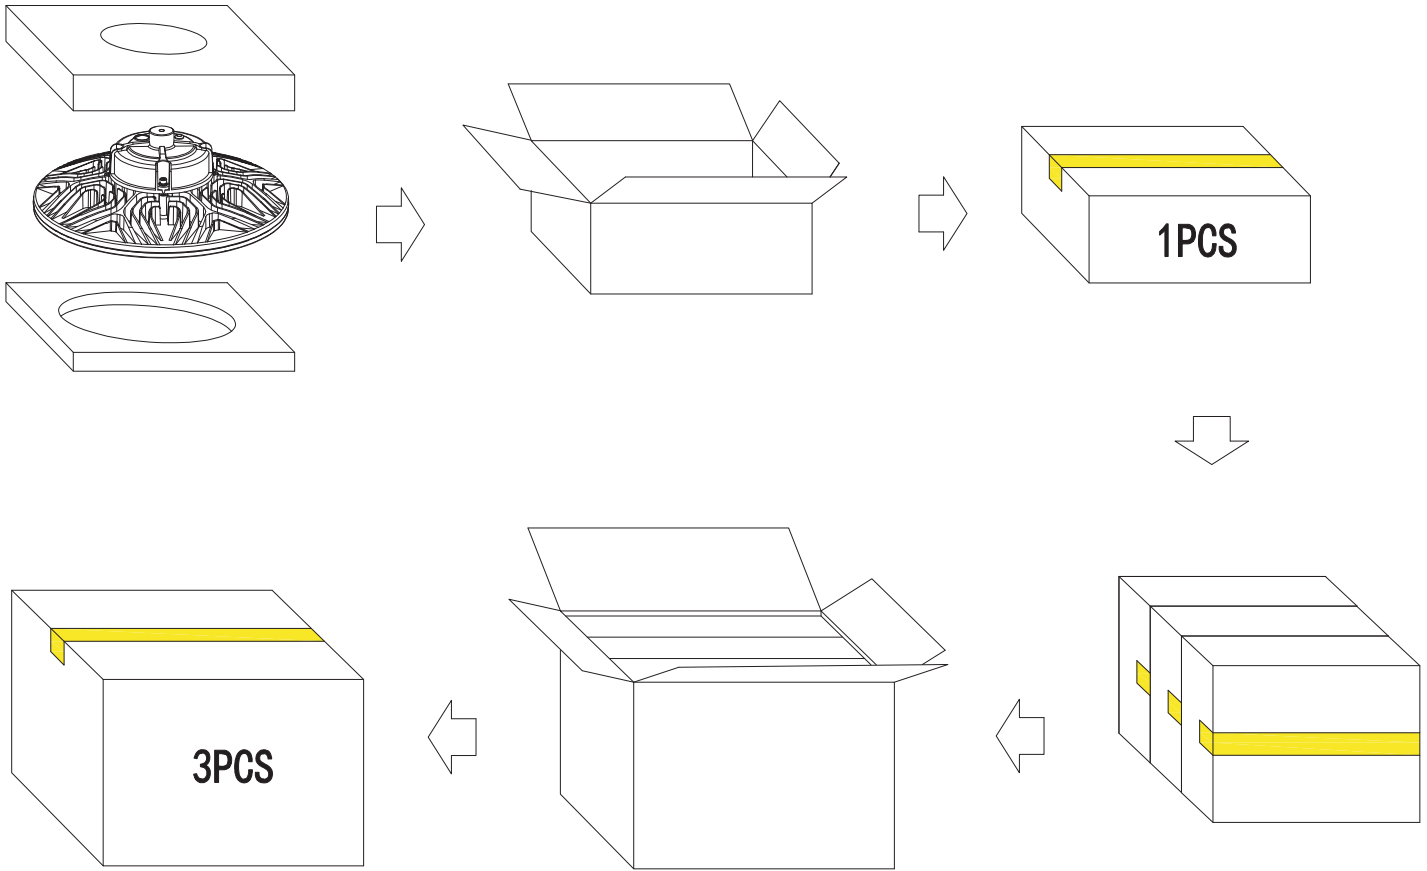

Power	Unit	Size	Grass weight	Volume
100W 150W	1PCS	330X330X150mm	3.5 Kg	0.016m <sup>3</sup>
	3PCS	500X350X355mm	14.5 Kg	0.063m <sup>3</sup>

Power	Unit	Size	Grass weight	Volume
200W 240W 300W	1PCS	390X390X150mm	4.3 Kg	0.023m <sup>3</sup>
	3PCS	490X410X415mm	17.5 Kg	0.084m <sup>3</sup>