



PETITE CANDLESTICK SWING-ARM FLOOR LAMP


ASSEMBLY AND INSTALLATION INSTRUCTIONS

ENGLISH

PETITE CANDLESTICK SWING-ARM FLOOR LAMP

PARTS INCLUDED

- (A) Socket Ring (1)
- (B) Threaded Socket (1)
- (C) Lamp Arm (1)
- (D) Upper Pole (1)
- (E) Threaded Collar (1)
- (F) Lower Pole (1)
- (G) Lamp Base (1)
- (H) Base Weight (1)
- (I) Washer (1)
- (J) Nut (1)
- (K) Wrench (1)
- (L) Bulb (1)

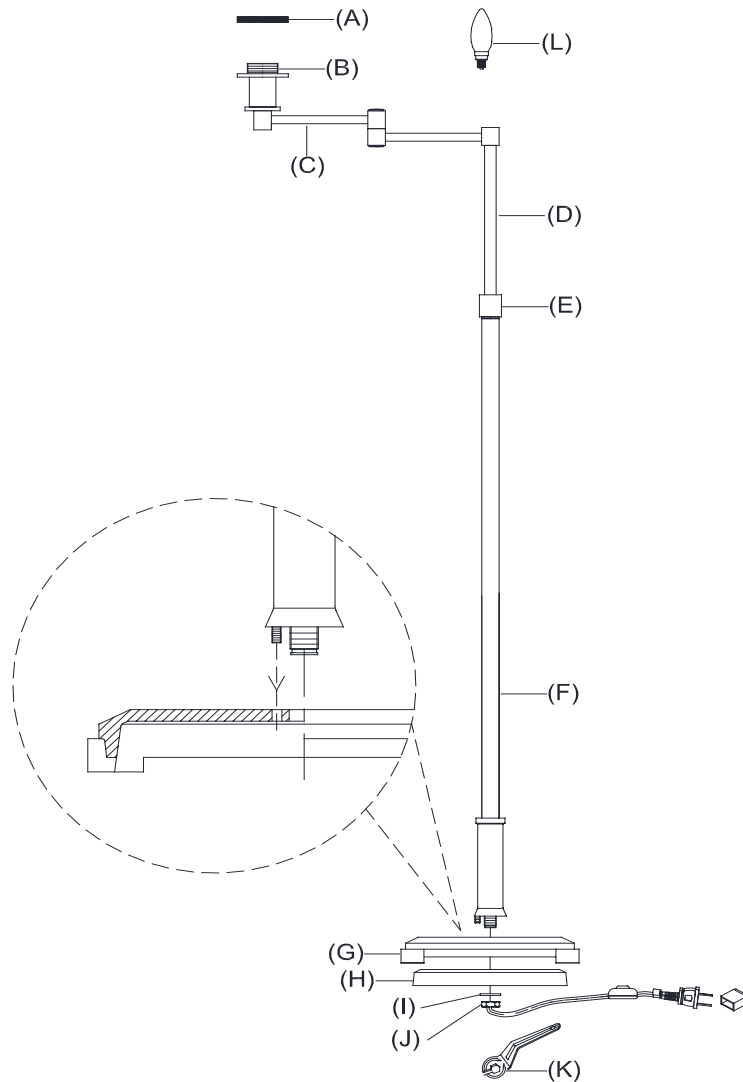

IMPORTANT: PLEASE READ

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE.

IMPORTANT SAFETY FEATURES

BULBS

This lamp has been rated for one (1) 60-watt maximum Type B incandescent lightbulb or one (1) 5.5-watt maximum SBLED lightbulb. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the lamp is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when lamp is illuminated. Keep flammable materials away from lit bulb.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

ASSEMBLY AND INSTALLATION

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

- Carefully remove all parts from the box and remove all plastic coverings. Place on a clean, solid surface.
- Remove the white plastic bushing from the inside of the bottom opening of Lower Pole (F) and the top of Lamp Base (G) before assembling.
- Join Lower Pole (F), Lamp Base (G) and Base Weight (H) together. Slide Washer (I) over the threaded nipple protruding from the bottom of Base Weight (H). Screw Nut (J) onto the threaded nipple to secure Lamp Base (G) to Lower Pole (F) and tighten using Wrench (K).
- Pull the wire until tight.
- Remove Socket Ring (A) from Threaded Socket (B). Attach the lamp shade (not included) over threaded section of Threaded Socket (B). Secure the shade onto Threaded Socket (B) with Socket Ring (A).
- Insert Bulb (L) into Threaded Socket (B).
- Plug into electrical outlet and test the lamp.
- Assembly is complete.

TO ADJUST HEIGHT:

- Loosen Threaded Collar (E) in a counterclockwise direction.
- Adjust lamp by pulling or pushing Upper Pole (D) up or down to desired height.
- Tighten Threaded Collar (E) in a clockwise direction.

TO ADJUST SHADE POSITION:

- Adjust the shade position by swinging Lamp Arm (C) if needed.

CARE INSTRUCTIONS

Do not use polishes or cleaners on the lamp. Wipe clean with a soft, dry cloth.