



STELO TASK FLOOR LAMP

ASSEMBLY AND INSTALLATION INSTRUCTIONS

ENGLISH





STELO TASK FLOOR LAMP**PARTS INCLUDED**

(A) Lamp Head (1)

(B) Lamp Body (1)

(C) Base (1)

(D) Transformer (1)

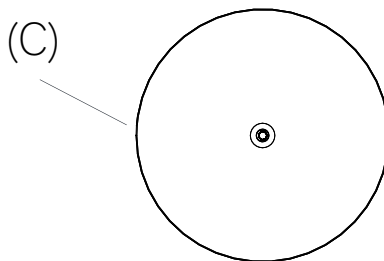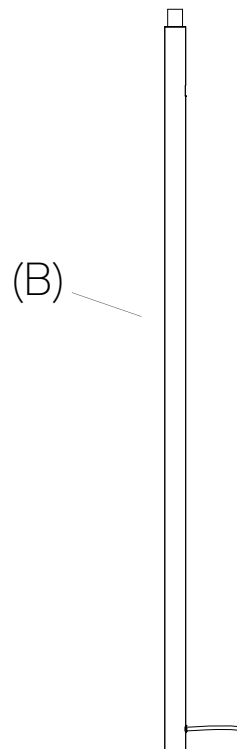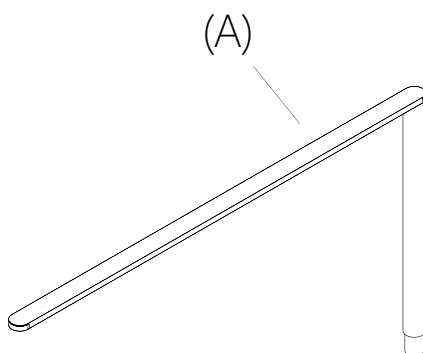

IMPORTANT: PLEASE READ**IMPORTANT SAFETY FEATURES****DIMMER SWITCH COMPATIBILITY**

This lamp is not dimmer-switch compatible.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.


WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.


THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

ASSEMBLY AND INSTALLATION**SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.**


1. Screw Lamp Body (B) into Base (C).

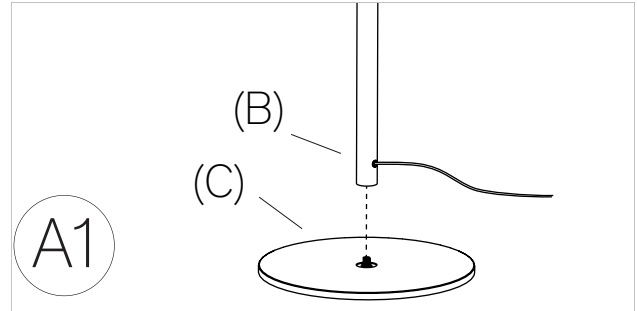


2. Push Lamp Head (A) down onto Lamp Body (B).

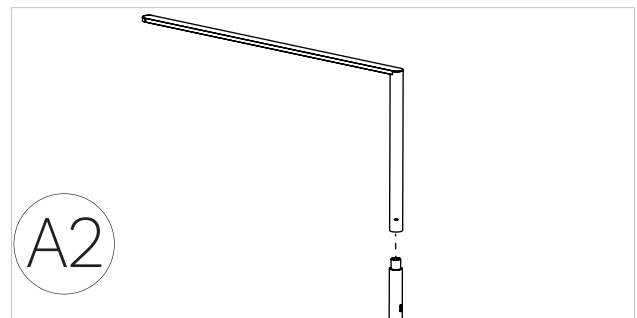


3. Plug Transformer (D) into the wall. Insert the transformer's cord into the end of the lamp's cord.

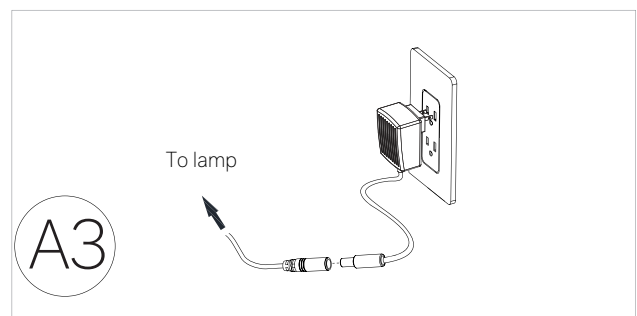

4. Press and hold the circle to change lighting color between warm and cool. Adjust brightness by placing your finger along the touchstrip.

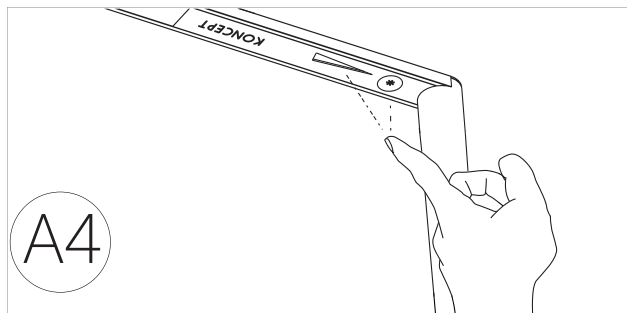

5. Adjust the lamp's height "telescopically" from 44.5" to 52" or anywhere in between. The lamp's body can swivel 360°. Phones, tablets and or other USB-compatible devices can be charged with the built-in USB port on the lamp's body.

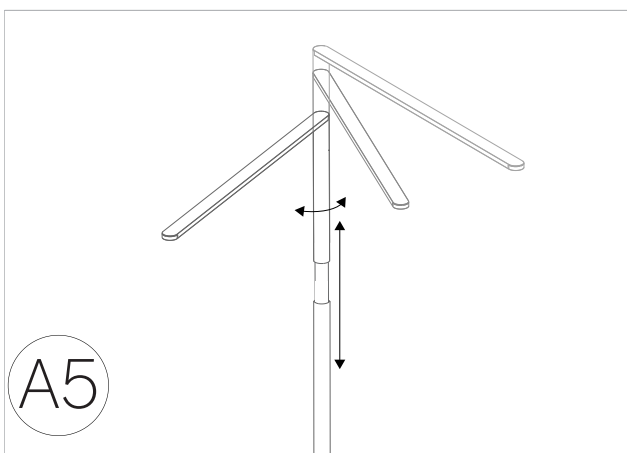


CARE INSTRUCTIONS

Do not use polishes or cleaners on the lamp. Wipe clean with a soft, dry cloth.


LED TAPE REPLACEMENT INSTRUCTIONS

PLEASE NOTE THAT THE LED REPLACEMENT MUST ONLY BE PERFORMED BY A LICENSED ELECTRICIAN


1. Unplug the transformer cord from the upper body cord. Unplug the transformer from the outlet.

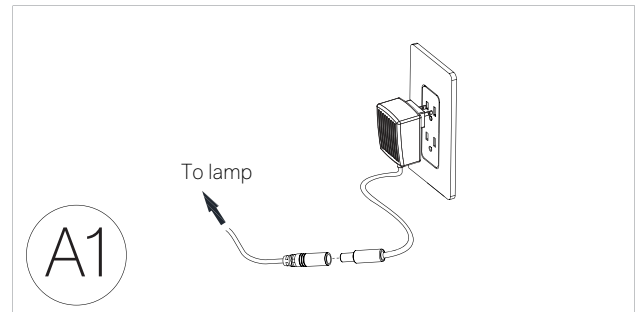

2. Remove the top lamp body from the lower body.

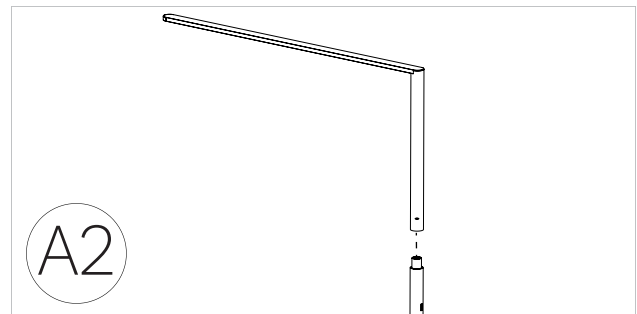

3. Put the replacement lamp body onto the lower body.

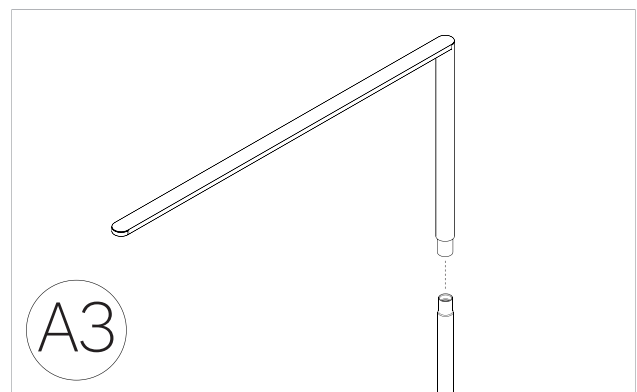

4. Plug the transformer into the wall. Insert the transformer's cord into the end of the lamp's cord.

