

## Z-BAR LED TASK FLOOR LAMP


ASSEMBLY AND INSTALLATION INSTRUCTIONS **ENGLISH** 



### **Z-BAR LED TASK FLOOR LAMP**

## PARTS INCLUDED

- (A) Floor Base (1)
- (B) Lower Body (1)
- (C) Upper Body (1)
- (D) LED Head (1)
- (E) Transformer(1)

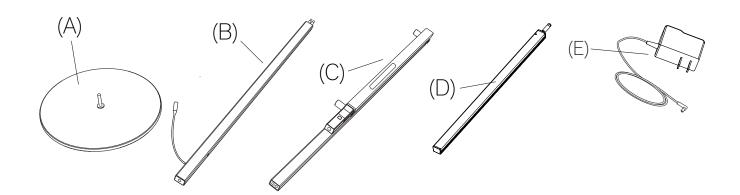



### IMPORTANT: PLEASE READ

#### **IMPORTANT SAFETY FEATURES**

#### **DIMMER SWITCH COMPATIBILITY**

This lamp is not dimmer-switch compatible.

### WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.

## WARNING: STRANGULATION HAZARD


Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

#### THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.


#### ASSEMBLY AND INSTALLATION

## SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.


1. Push down LED Head (D) into Upper Body (C) until they click into place.



2. Push down Upper Body (C) into Lower Body (B) until they click into place.




3. Push down Lower Body (B) into Floor Base (A) until they click into place.




REVISION 02-27-25 RH.COM




4. Locate the pre-installed screw on Lower Body (B) and tighten it securely to attach Lower Body (B) to Floor Base (A).



5. Plug the transformer cord into the upper body cord (B) and plug the Transformer (E) into your outlet.



6. Use the touchstrip to control brightness and power.



### CARE INSTRUCTIONS

Do not use polishes or cleaners on the lamp. Wipe clean with a soft,  $\mbox{\sc dry}$  cloth.


REVISION 02-27-25 RH.COM




### LED TAPE REPLACEMENTINSTRUCTIONS

# PLEASE NOTE THAT THE LED REPLACEMENT MUST ONLY BE PERFORMED BY A LICENSED ELECTRICIAN


Unplug Transformer (E) cord from the upper body cord (B).
Unplug Transformer (E) from your outlet.



2. Detach LED Head (D) from Lamp Body (C).



3. Push LED Replacement Head (D) into Lamp Body (C) until they click into place.



4. Plug the transformer cord into the upper body cord (B) and plug the Transformer (E) into your outlet.

